



1. SPECIFICATION

AD-403-PP

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	3	
02	Operating Voltage	V	2.0~ 4.3	
03	Consumption Current	mA (Max)	90	Standard state, standard drive circuit. Rated voltage, rated frequency, Square wave 1/2 duty.
04	Sound pressure level (Distance at 5 cm)	dB(A) (Min)	75	
	Sound pressure level (Distance at 10 cm)		65	
05	Direct Current Resistance	Ω	17 ± 3	
06	Rated Frequency	Hz	4000	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

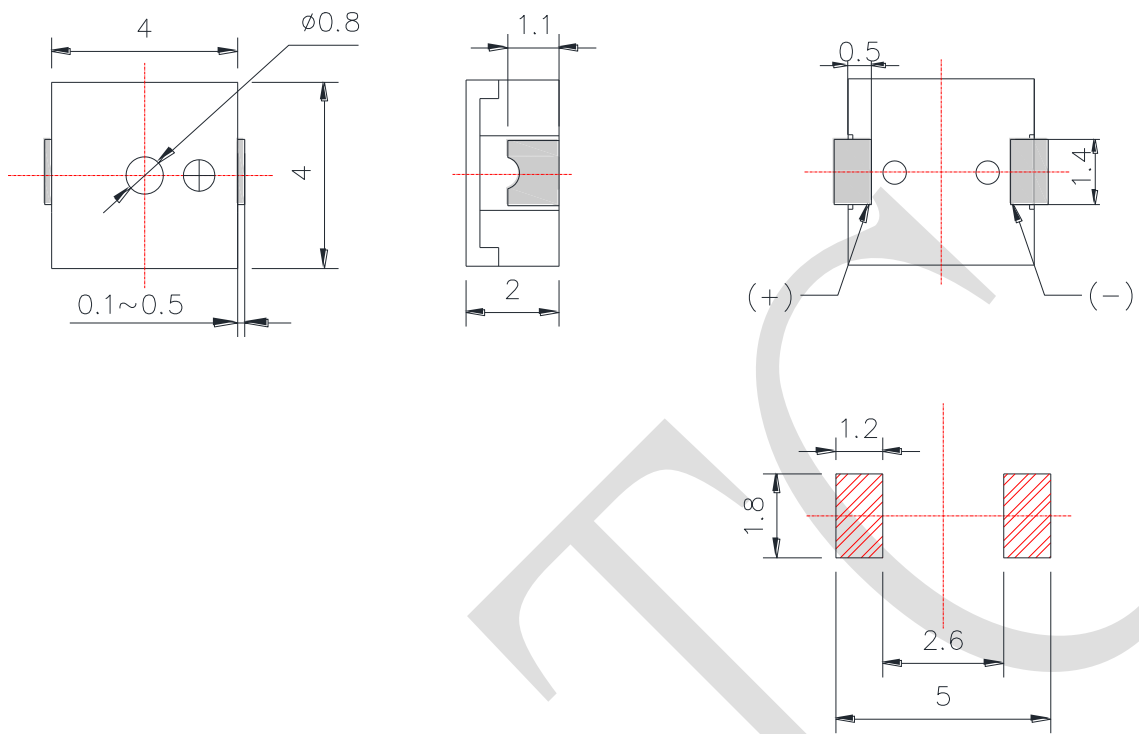

RECOMMENDED P.C.B LAYOUT

RoHS

TITLE: SOUND TRANSDUCER (SMD)		DRAWN: Hank	2021/9/2	SCALE: 1:1	SHEET: 1 : 1
PART NO. AD-403-PP		DESIGNED: R & D OF AAT		UNITS: mm	
DWG NO. FDM-2859 SMD-040020F-03040		6 REV	CHECKED:	TOLERANCE ± 0.3	
			APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: LCP		ONE PLACE DECIMAL ± ***	
				TWO PLACE DECIMAL ± ***	
				THREE PLACE DECIMAL ± ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC