

1. SPECIFICATION

AC-10H3CR


ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	3	 Standard state, standard drive circuit. Square wave 1/2 duty.
02	Operating Voltage	V	2 ~ 4	
03	Consumption Current	mA Max.	50	
04	Sound pressure level (Distance at 10cm)	dB(A) Min.	85	Rated voltage, rated frequency.
05	Direct Current Resistance	Ω	40 ± 6	
06	Rated Frequency	Hz	2730	
07	Operating Temp.	℃	-30 ~ +70	
08	Storage Temp.	℃	-40 ~ +85	
09	Weight	g	1.0	

REV NO.

REVISION NOTE

APPROVAL




DATE

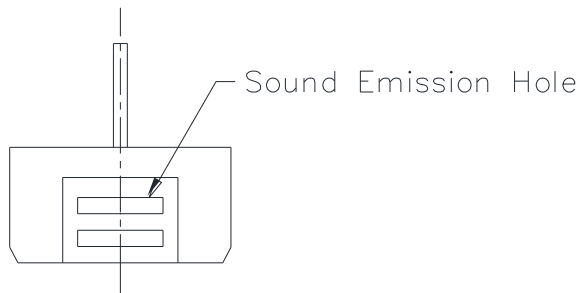

DATE CODE
2 : YEAR
J : MONTH

Laser

AC-10H3
CR

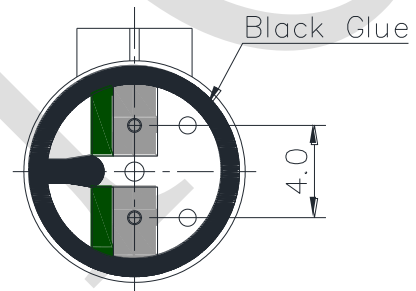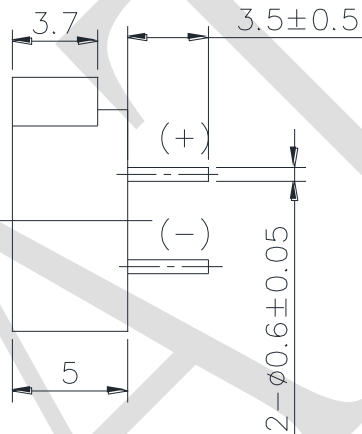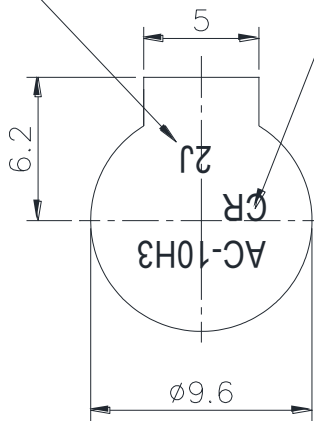

RoHS

TITLE: SOUND TRANSDUCER DIMENSIONS

DRAWN: Zack 2020/01/21

SCALE: 3/1 SHEET: 1 OF 1

PART NO. AC-10H3CR

DESIGNED: R&D OF AAT

UNITS: mm

CHECKED:

TOLERANCE ± 0.5

DWG NO. ****_*****

APPROVAL:

UNLESS OTHERWISE SPECIFIED:

ONE PLACE DECIMAL ± ***

TWO PLACE DECIMAL ± ***

THREE PLACE DECIMAL ± ***

MATERIAL: NORYL



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC