


1. SPECIFICATION

AC-1205G-N1LF


ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	5	 Standard state, standard drive circuit. Square wave 1/2 duty.
02	Operating Voltage	V	3 ~ 8	
03	Consumption Current	mA Max.	40	
04	Sound pressure level (Distance at 10cm )	dB(A) Min.	85	Rated voltage, rated frequency.
05	Direct Current Resistance	Ω	40±6	
06	Rated Frequency	Hz	2400	

REV NO.

REVISION NOTE

APPROVAL

DATE

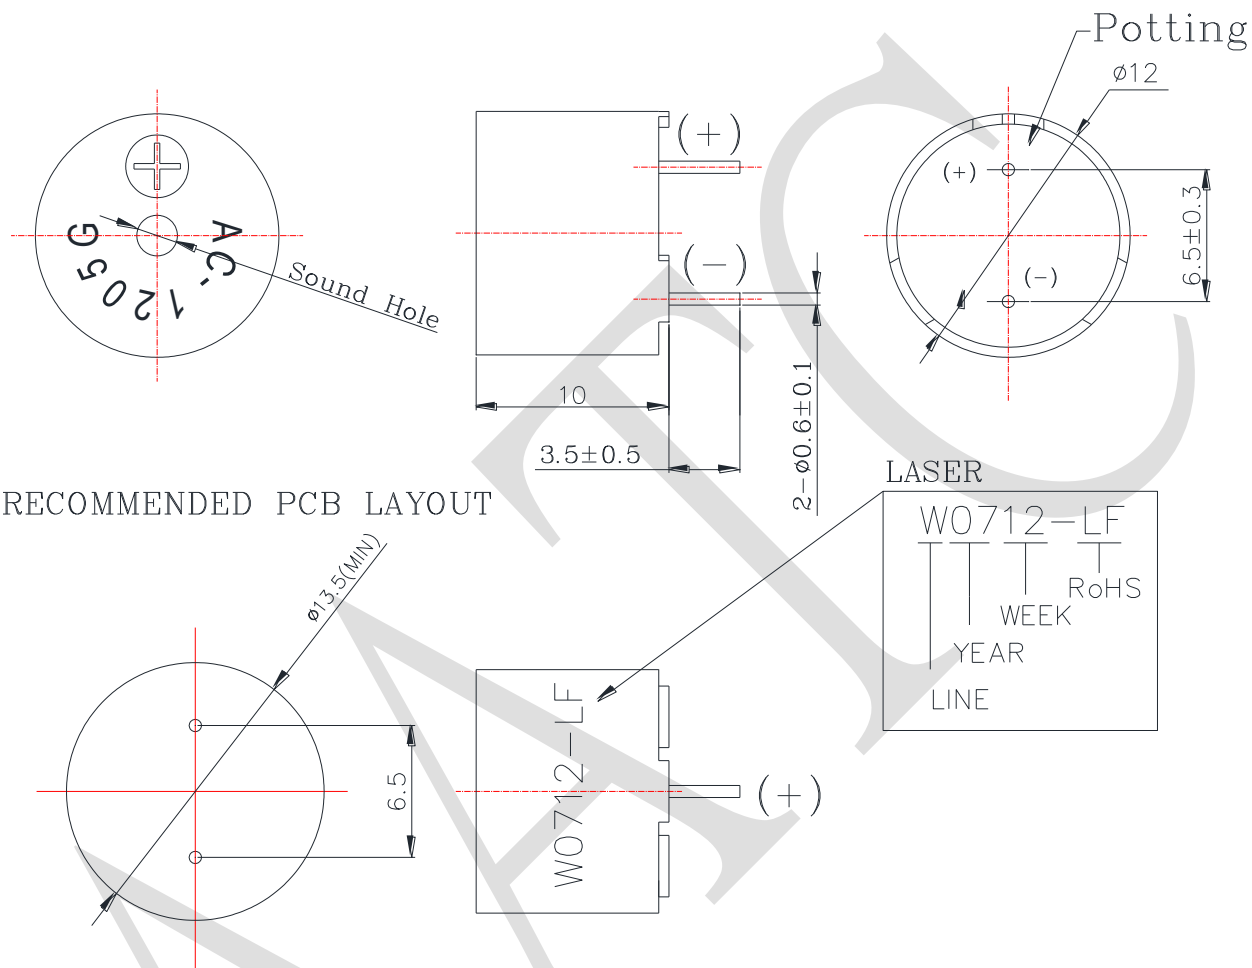

RECOMMENDED PCB LAYOUT

LASER

W0712-LF  
 WEEK  
 YEAR  
 LINE  
 RoHS

RoHS

TITLE: MAGNETIC BUZZER		DRAWN: Handk	2020/02/19	SCALE: 3:1	SHEET: 1 OF 1
PART NO. AC-1205G-N1LF	6	DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. UGCM1205AP3.5BH10-R40		CHECKED:	TOLERANCE $\pm 0.5$		
REV		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL $\pm$ *** TWO PLACE DECIMAL $\pm$ *** THREE PLACE DECIMAL $\pm$ ***		
		MATERIAL: PBT			



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC