



1. SPECIFICATION

AI-10H3C

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	3	
02	Operating Voltage	V	2~ 5	
03	Consumption Current	mA (Max)	30	Rated Voltage
04	Resonant Frequency	Hz	2700± 300	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	80	Distance at 10cm Rated Voltage / Resonant Frequency
07	Operating Temp.	℃	-40 ~ +85	
08	Storage Temp.	℃	-40 ~ +85	
09	Weight	g	1 ±0.3	

REV NO.

REVISION NOTE

APPROVAL

DATE

PRINT:Laser & Date code (Ex. 2015.07)

AI-10H3C




15G

Year
2015Month
(A-L)

AI-10H3C



15G

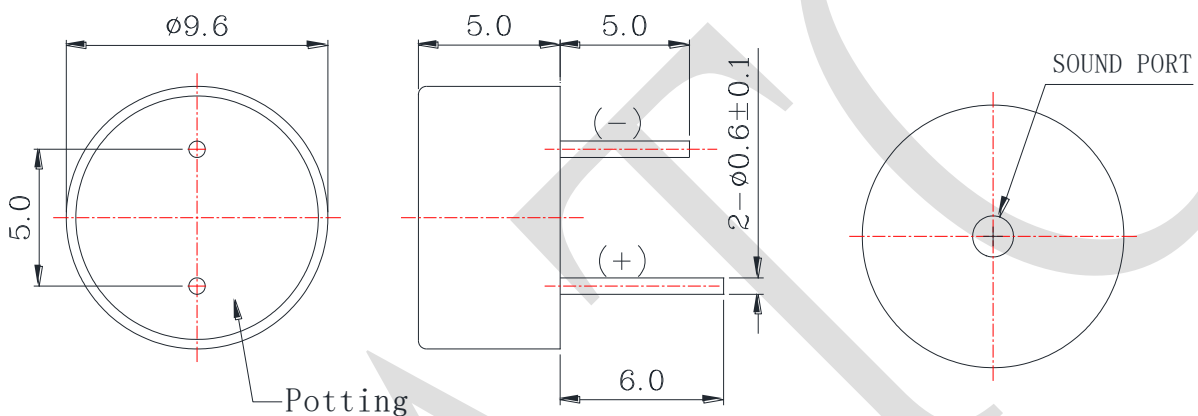REMOVE
AFTER
WASHING

MASKING LABEL

RoHS

TITLE: ELECTRO MAGNETIC BUZZER

DRAWN: Zack 2020/05/21

SCALE: 4:1 SHEET: 1 of 1

PART NO. AI-10H3C

3

DESIGNED: R&D OF AAT

UNITS: mm

CHECKED:

TOLERANCE ± 0.5

APPROVAL:

UNLESS OTHERWISE SPECIFIED:

DWG NO. UGCM0903XP6.05.01C-B

REV

MATERIAL: PBT

ONE PLACE DECIMAL ± ***
TWO PLACE DECIMAL ± ***
THREE PLACE DECIMAL ± ***

ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC