


1. SPECIFICATION

AK-230810-MM-1

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 23 mm	
03	Rated Input Power	1.0 W	
04	Max. Input Power	1.5 W for 1 minute	
05	Impedance	$8\Omega \pm 15\%$ at 2KHz 1V	
06	Resonance Frequency (Fo)	700Hz $\pm$ 20% at Fo, 1V	
07	Sound pressure level	95dB(1.0W/0.1M) $\pm$ 3 dB	at AVE 0.8, 1.0, 1.2, 1.5 KHz.
08	Frequency Range	Fo – 10 K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 1.5V.	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

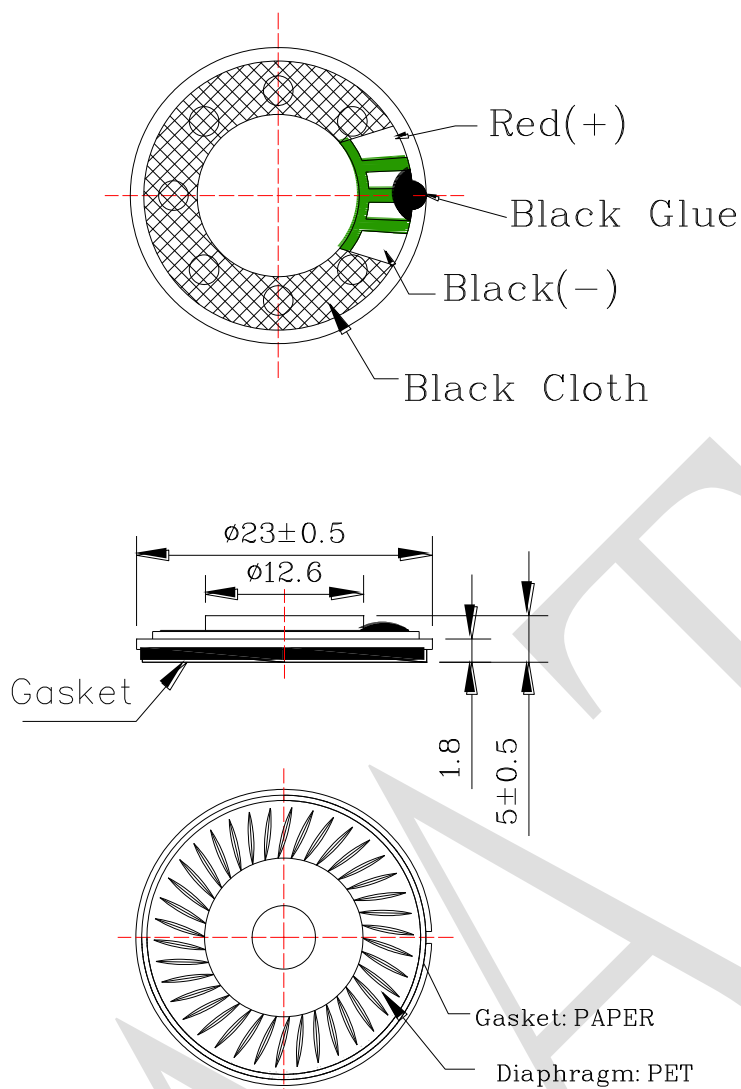

RoHS

TITLE: DYNAMIC SPEAKER		DRAWN: Moose	2016/11/30	SCALE: 2:1	SHEET: 1:1
PART NO. AK-230810-MM-1		1	DESIGNED: R&D OF AAT	UNITS: mm	
DWG NO. CXS23050-R08W1.0-B			CHECKED:	TOLERANCE ± 0.5	
			APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***	
		REV	MATERIAL: SPCC		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC