

1. SPECIFICATION

AK-402008CC-6C7 (RoHS)


ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 40X20mm	
03	Rated Input Power	2.0 W	
04	Max. Input Power	3.0 W for 1 minute	
05	Impedance	8Ω ± 15% at 1 KHz 1V	
06	Resonance Frequency (Fo)	400 Hz ± 20% at Fo, 1V	
07	Sensitivity (S.P.L.)	72 dB(1.0W/1.0M) ± 3 dB	at AVE 0.6,0.8,1.0,1.2KHz.
		95 dB(2.0W/0.1M) ± 3 dB	
08	Frequency Range	Fo – 2.2 K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 1.5V.	

REV NO.

REVISION NOTE

APPROVAL

DATE

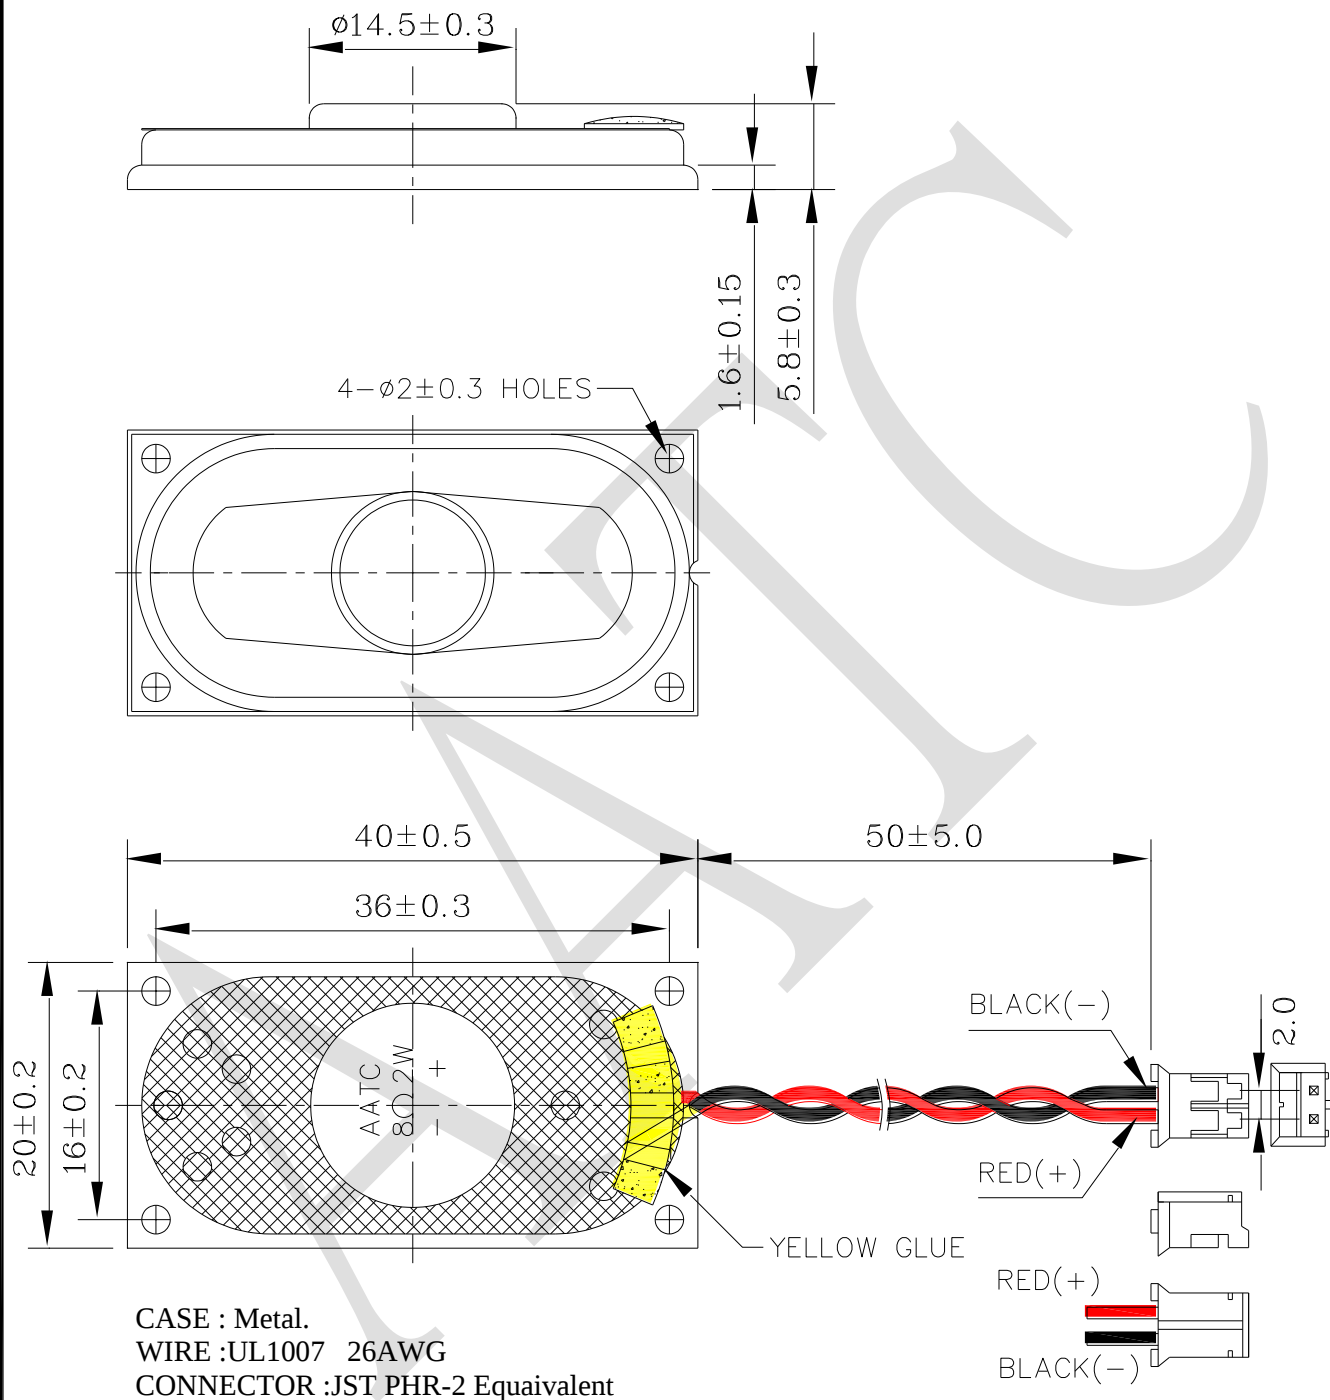

TITLE: DYNAMIC SPEAKER

DRAWN: Zack

2011/04/26

SCALE: 2:1

SHEET: 1 of 1

PART NO. AK-402008CC-6C7

DESIGNED: R&D OF AAT

UNITS: mm

DWG NO. HS-110426

CHECKED:

TOLERANCE ± 0.5

APPROVAL:

UNLESS OTHERWISE SPECIFIED:

MATERIAL:

ALLOY

ONE PLACE DECIMAL $\pm$ ***TWO PLACE DECIMAL $\pm$ ***THREE PLACE DECIMAL $\pm$ ***

苙翔科技股份有限公司
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC