


1. SPECIFICATION

AK-414108JF-1C

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimensions	41 X 41 mm	
03	Rated Input Power	5.0 W	
04	Max. Input Power	7.0 W for 1 minute	
Ⓐ	Impedance	8Ω ± 15% at 0.8KHz 1V	
Ⓑ	Resonance Frequency (Fo)	260 Hz ± 20% at Fo, 1V	
07	Average Sound Pressure Level	97 dB(1.0W/0.1M) ± 3 dB	FO ~ 8KHz Average Sound Pressure Level
		104 dB(5.0W/0.1M) ± 3 dB	
		Ⓒ 93 dB(5.0W/0.3M) ± 3 dB	
08	Frequency Range	Fo – 3350 Hz , Sound Pressure Level ± 3 dB 3350 – 8K Hz , Sound Pressure Level ± 5 dB	
09	Total Harmonics Distortion	Max 5 % at 1 KHz, 1.5V.	

<i>REV NO.</i>	<i>REVISION NOTE</i>	<i>APPROVAL</i>	<i>DATE</i>
----------------	----------------------	-----------------	-------------

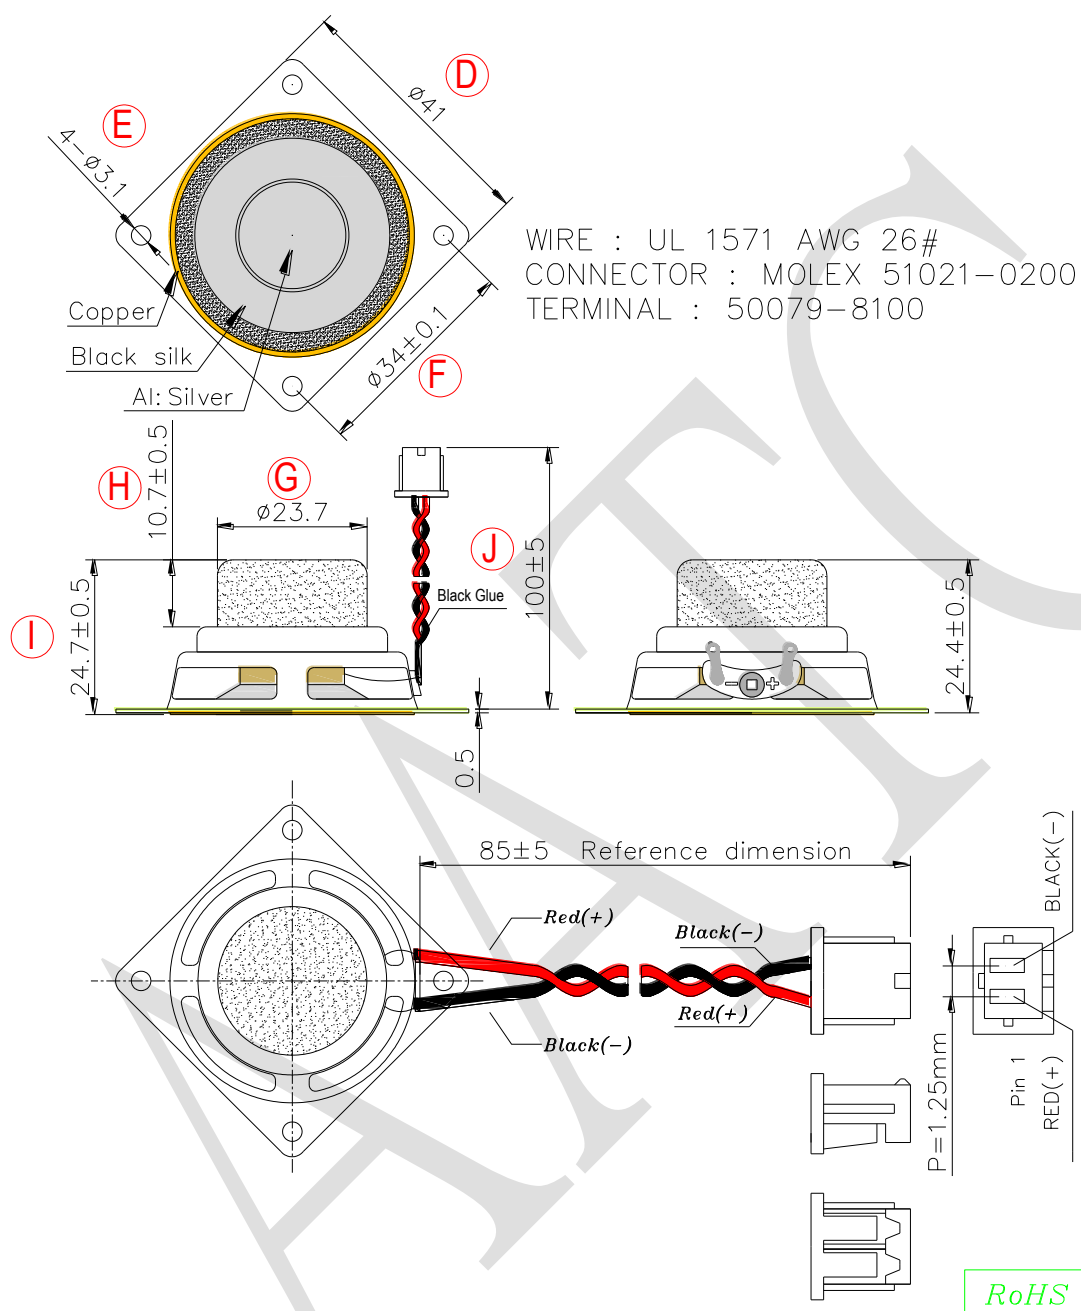

TITLE: DYNAMIC SPEAKER		DRAWN: Zack		2019/01/21	SCALE: 1:1	SHEET: 1 of 1
PART NO. AK-414108JF-1C		2	DESIGNED: R & D OF AAT		UNITS: mm	
DWG NO. HS-110302			CHECKED:		TOLERANCE ± 0.3	
			APPROVAL:		UNLESS OTHERWISE SPECIFIED:	
		REV	MATERIAL: SPCC		ONE PLACE DECIMAL $\pm$ ***	
					TWO PLACE DECIMAL $\pm$ ***	
					THREE PLACE DECIMAL $\pm$ ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC