


1. SPECIFICATION

AK-77770820-MP-1C

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 77 x 77 mm	
03	Rated Input Power	2.0 W	
04	Max. Input Power	3.0 W for 1 minute	
05	Impedance	8Ω ± 15% at 0.8KHz 1V	
06	Resonance Frequency (Fo)	300 Hz ± 20% at Fo, 1V	
07	Sound pressure level	92 dB(1.0W/0.5M) ± 3 dB	at AVE 1, 1.4, 1.7, 2 KHz..
		105 dB(1.0W/0.1M) ± 3 dB	
		109 dB(2.0W/0.1M) ± 3 dB	
08	Frequency Range	Fo – 3.0K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz,4V.	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

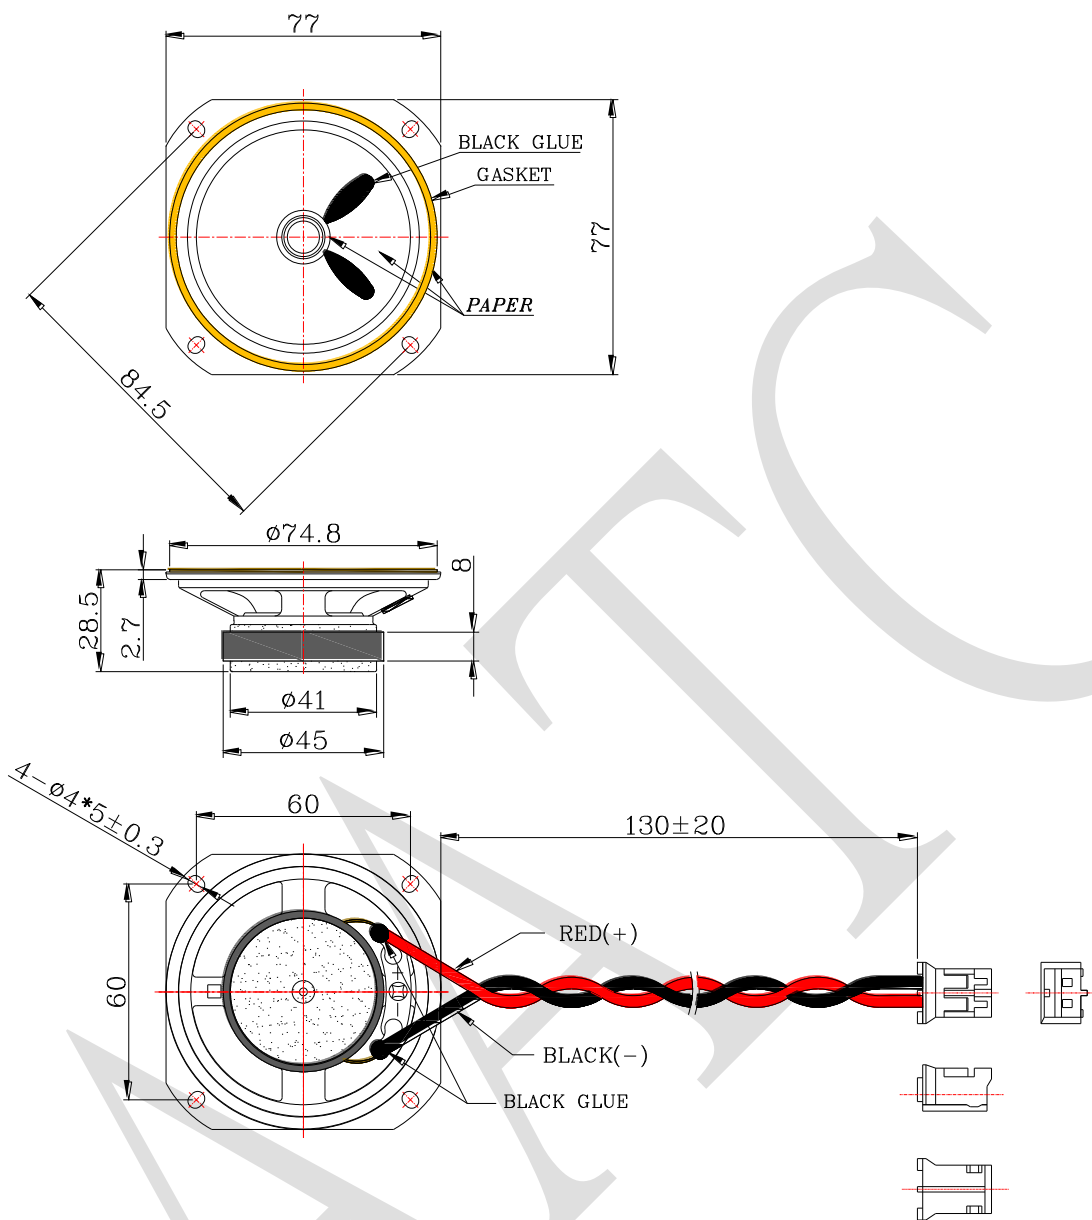

WIRE: UL 1571.AWG28#
CONNECTOR: Equivalent to JST PHR-2

RoHS

TITLE: DYNAMIC SPEAKER		DRAWN: Moose	2018-01-18	SCALE: 2:1	SHEET: 1:1
PART NO. AK-77770820-MP-1C		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO.		CHECKED:	TOLERANCE ± 0.5		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
		MATERIAL: SPCC	ONE PLACE DECIMAL ± ***		
			TWO PLACE DECIMAL ± ***		
			THREE PLACE DECIMAL ± ***		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC