


1. SPECIFICATIONS**AMF-O60C36-CWH (RoHS)**

01	Electret Type	Foil type
02	Sensitivity	-36±3dB (0dB=1V/Pa,1KHz)
03	Standard Operation Voltage	2.0V
04	Output Impedance (Max)	2.2KΩ
05	Directivity	Omni directional
06	Frequency Range	20 - 16K Hz
07	Max. Operation Voltage	10V
08	Current Consumption	Max.0.5mA
09	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
10	S/N Ratio	≥58dB
11	Sound Pressure Level	110dB

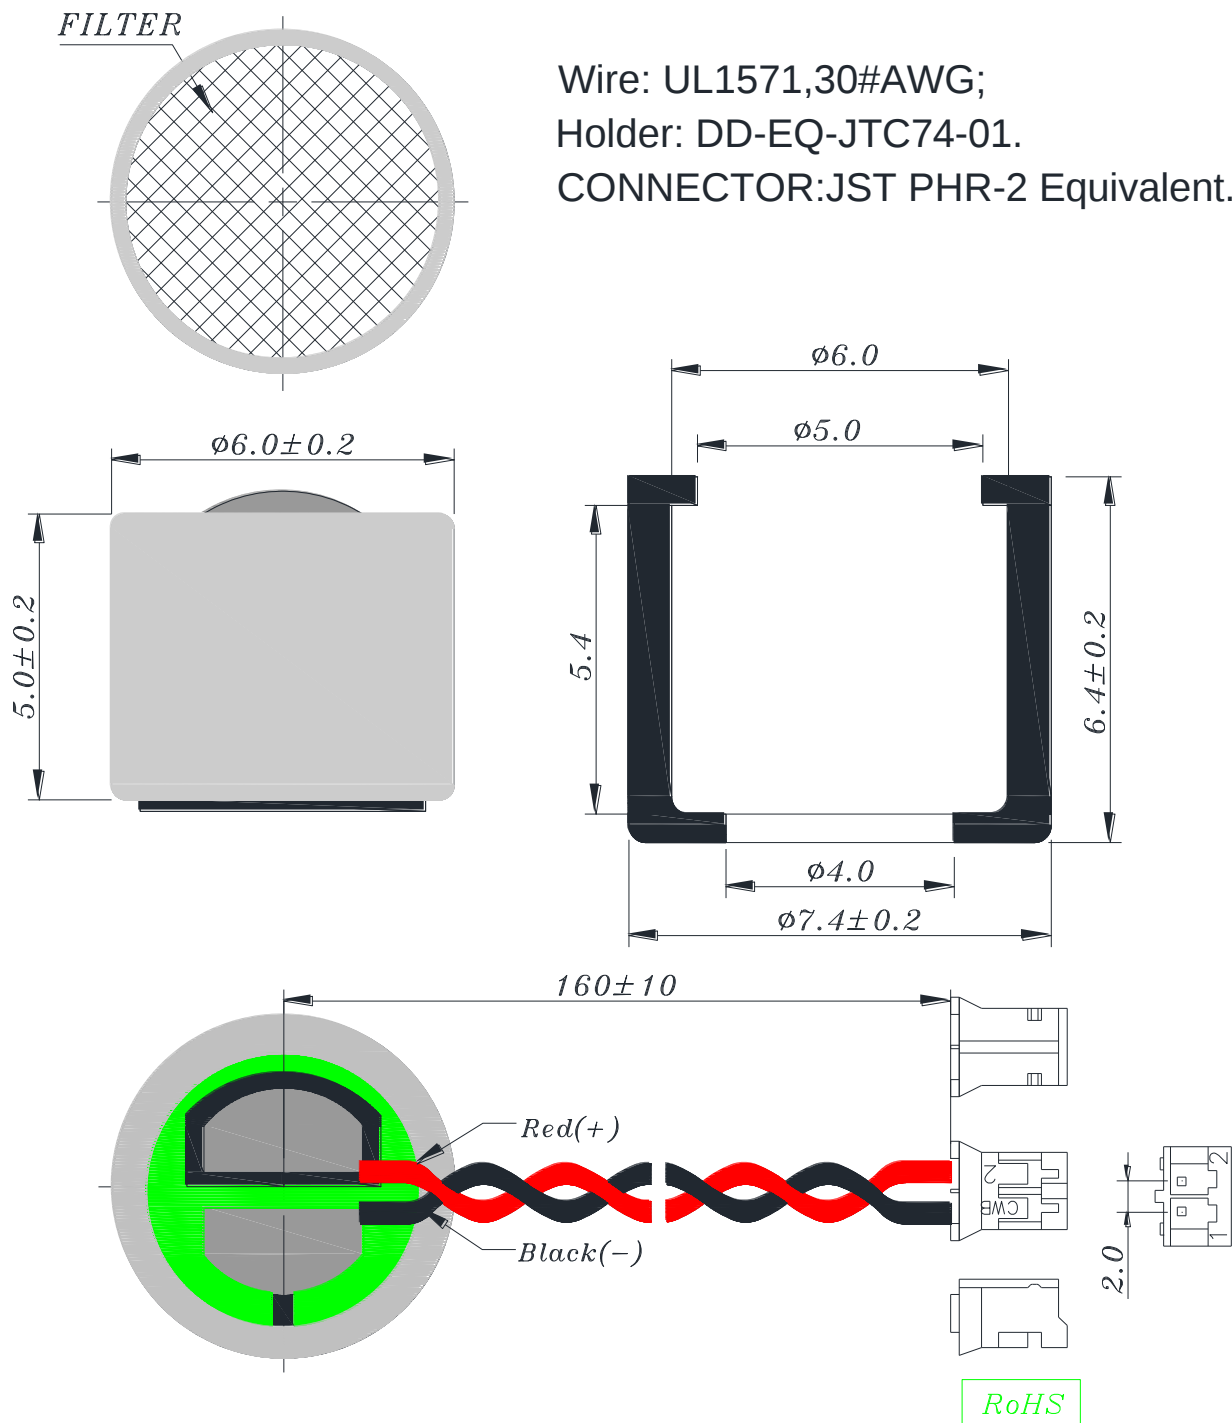

TITLE: MICROPHONE

DRAWN: Jason 2010-01-05

SCALE: 5:1 SHEET: 1 of 1

PART NO. AMF-060C36-CWH

DESIGNED: R & D OF AAT

UNITS: mm

DWG NO. HL-100105

CHECKED:

TOLERANCE ± 0.3

APPROVAL:

UNLESS OTHERWISE SPECIFIED:

ONE PLACE DECIMAL $\pm$ ***TWO PLACE DECIMAL $\pm$ ***THREE PLACE DECIMAL $\pm$ ***

REV

MATERIAL: *****



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.