


1. SPECIFICATIONS

AMF-O97L42-CWH

01	Electret's Type	Foil type
02	Sensitivity	-42±3dB (0dB=1V/Pa,1KHz)
03	Standard Operation Voltage	1.5 V
04	Output Impedance	1.5KΩ
05	Directivity	Omni directional
06	Frequency Range	100 - 20K Hz
07	Max. Operation Voltage	10V
08	Current Consumption	Max.0.5mA
09	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
10	S/N Ratio	≥58dB
11	Sound Pressure Level	110 dB

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

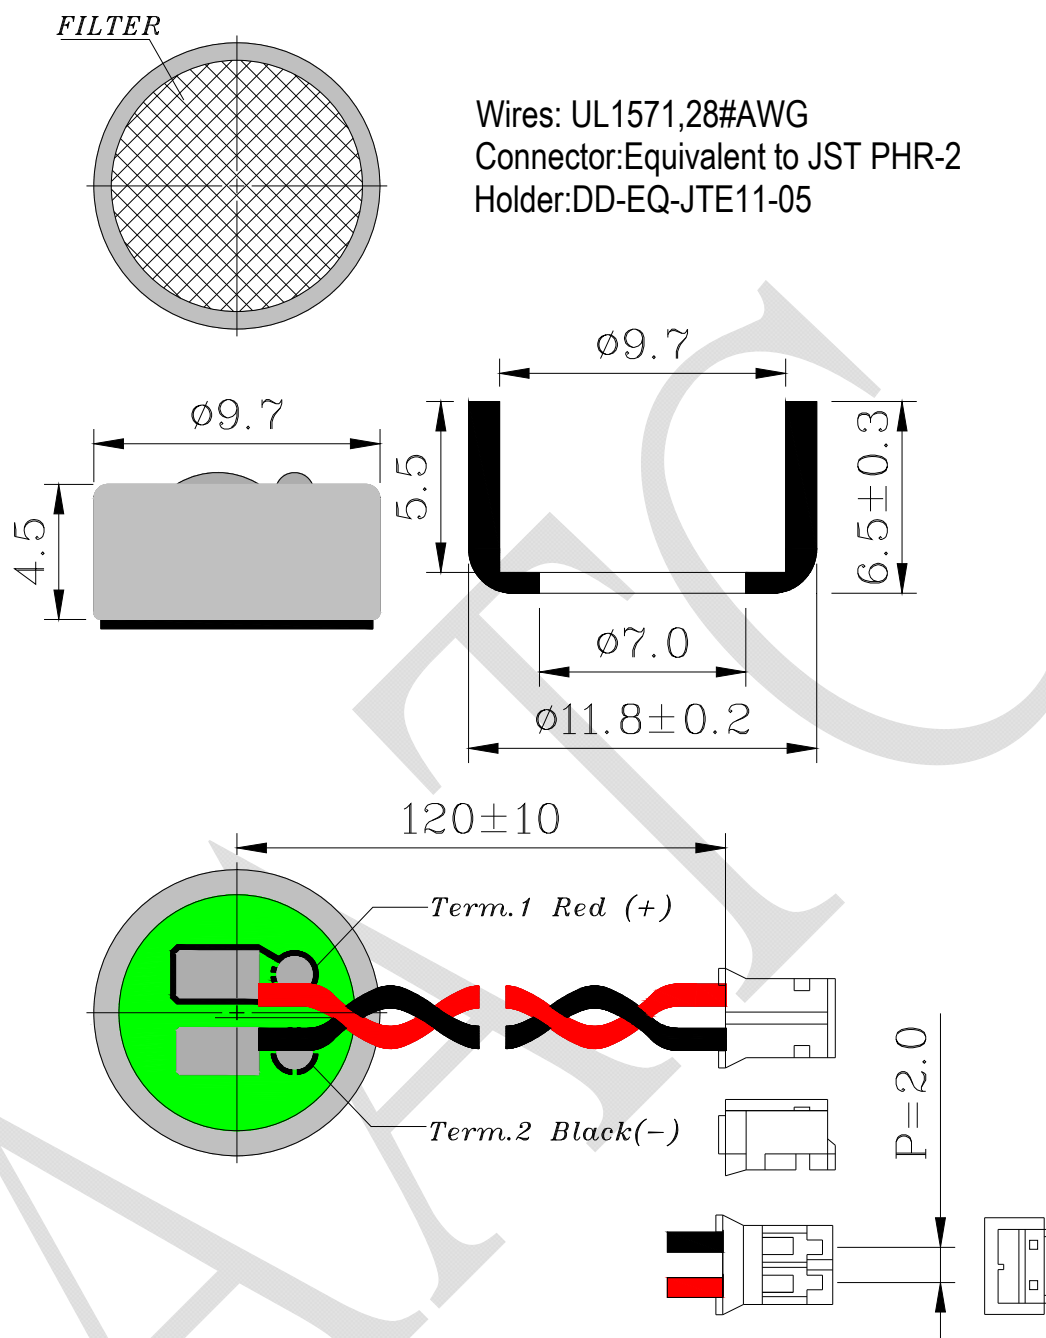

TITLE: MICROPHONE		DRAWN: Zack		2010/04/01		SCALE: 5:1		SHEET: 1 of 1	
PART NO. AMF-097L45-CWH		1	DESIGNED: R & D OF AAT		UNITS: mm				
DWG NO. F9745AL-SN-D120-M 9734			CHECKED:		TOLERANCE ± 0.3				
			APPROVAL:		UNLESS OTHERWISE SPECIFIED:				
		REV	MATERIAL: *****		ONE PLACE DECIMAL ± ***				
					TWO PLACE DECIMAL ± ***				
				THREE PLACE DECIMAL ± ***					



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC