

1. SPECIFICATION

AR-1032-MM-1W1




ITEM		SPECIFICATIONS
01	Type	Dynamic 10mm receiver unit
02	Sound pressure level	110 dB ±3 dB at 1KHz 179mV with IEC318 coupler.
03	Impedance	32 Ω ± 15%
04	Frequency Range	300 ~ 3.4 K Hz
05	Rated Input Power	10 m W
06	Max. Input Power	20 m W
07	Total Harmonics Distortion	Max 10 % at 1 KHz,10 m W.

REV NO.

REVISION NOTE

APPROVAL

DATE

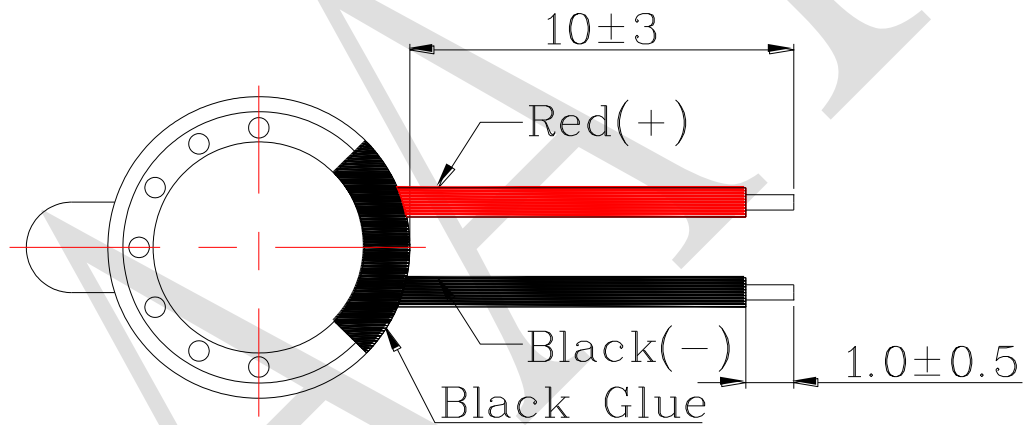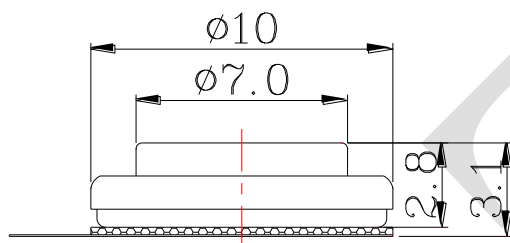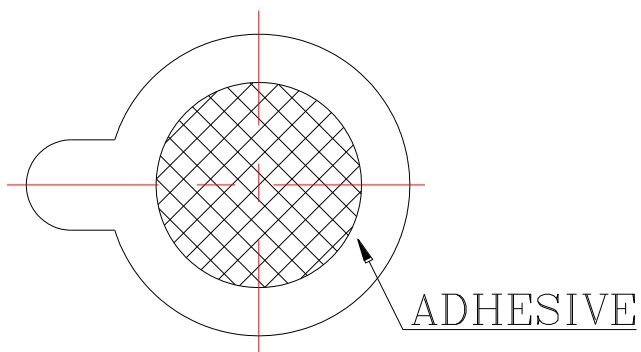

Wire: UL 1571.AWG32#

RoHS

TITLE: DYNAMIC RECEIVER

DRAWN: Zack

2016/01/25

SCALE: 2:1

SHEET: 1:1

PART NO. AR-1032-MM-1W1

DESIGNED: R&D OF AAT

UNITS: mm

CHECKED:

TOLERANCE ± 0.5

APPROVAL:

UNLESS OTHERWISE SPECIFIED:

DWG NO. CXR10031L10-R32-A

1

REV

MATERIAL: SPCC

ONE PLACE DECIMAL $\pm$ ***TWO PLACE DECIMAL $\pm$ ***THREE PLACE DECIMAL $\pm$ ***

ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC