


SPECIFICATION**AR-616-PM2**

	ITEM	UNIT	SPECIFICATIONS	CONDITION
01	Dimension	mm	Φ 6	Refer to attached drawing in details.
02	Input power	mW	5	At 0.28V
03	Max. Input power	mW	Max. 10	At 0.4V
04	Impedance	Ω	$16 \pm 15\%$	at 1KHz
05	Sound pressure level	dB	102 ± 3	at 1KHz 126 mV /1mW with IEC711 coupler.
06	Frequency range	Hz	20~20K	
07	Total Harmonics Distortion	%	Max. 2.5	at 50Hz~5 KHz 280 mV / Input power.
08	Operating temp.	°C	-20 ~ 55	
09	Storage temp.	°C	-30 ~ 65	
10	Weight	g	0.3 ± 0.1	
11	Buzze & Rattle	Hz	50 ~ 5K	Should not be audible at 126mV sine wave, Input power.

DIMENSIONS

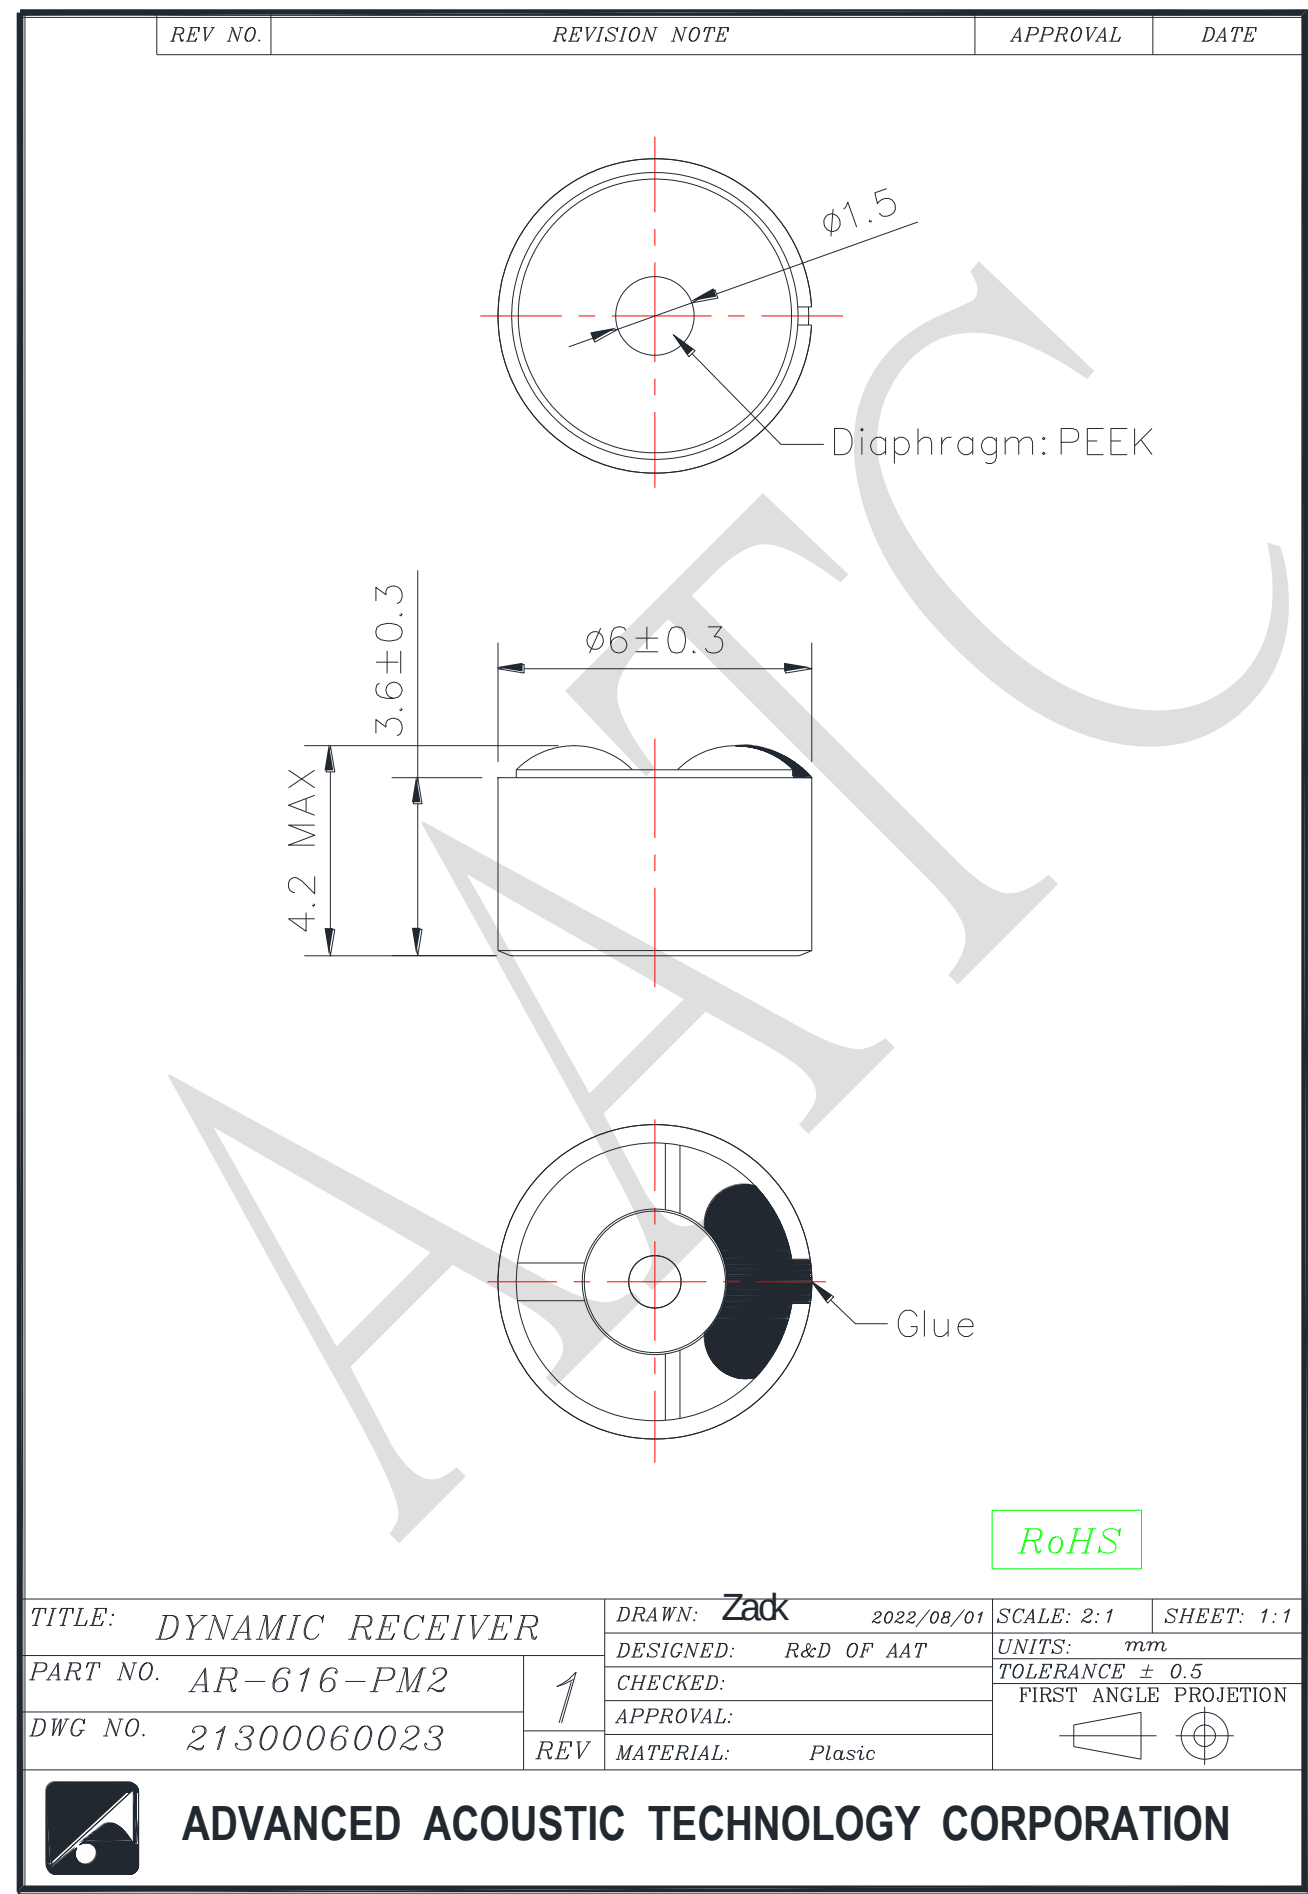

AATC