


1. SPECIFICATION

AKVB-220410-M1

ITEM		SPECIFICATIONS
01	Type	Vibration Speaker
02	Dimension	External diameter 22 mm
03	Rated Input Power	1.0W
04	Max. Input Power	2.0 W for 1 minute
05	Impedance	$4.0\Omega \pm 15\%$ at 2.0KHz 2V
06	Resonance Frequency (Fo)	380 Hz $\pm 20\%$ at Fo, 2V
07	Frequency Range	Fo -20K Hz
08	Total Harmonics Distortion	Max 10.0 % at 1 KHz, 0.1 W.
09	Weight	10.4g ± 0.1 g
10	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.
11	Operation Test	Must be normal at program source 1.0W
12	Buzz, Rattle, etc.	Should not be audible at 2.0V sine wave between Fo to 2KHz
13	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.
14	Terminal Strength	Capable of withstand 1kg load for 15 seconds without resulting in any damage or rejection.
15	Temperature	Operating temperature: -30°C to +60°C Storage temperature: -40°C to +70°C

3. DIMENSIONS

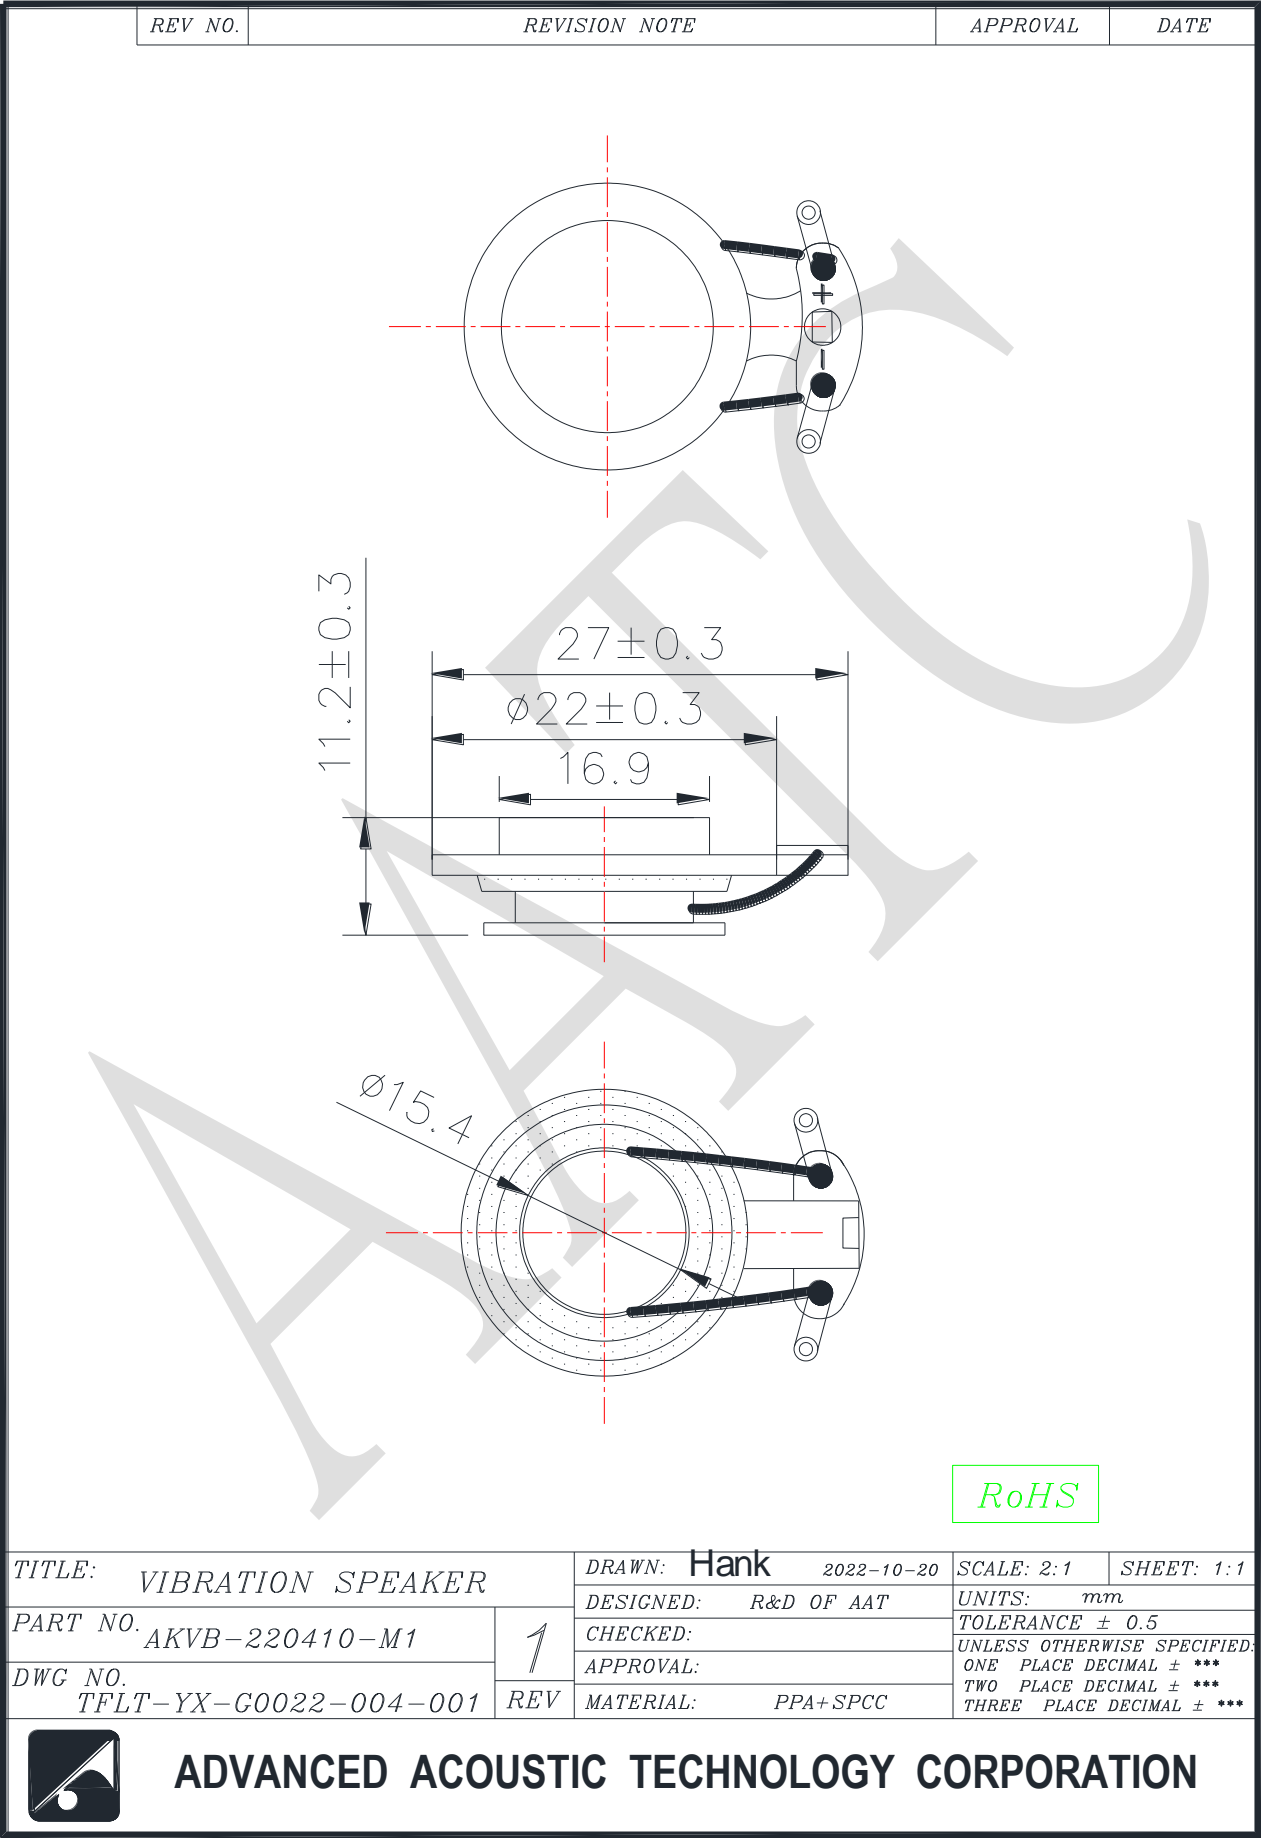

AATC