


1. SPECIFICATIONS

AMF-O60C25-1CB

01	Electret's Type	Foil type
02	Sensitivity	-25±3dB (0dB=1V/Pa,1KHz)
03	Standard Operation Voltage	2.0 V
04	Output Impedance	2.2 KΩ
05	Directivity	Omni directional
06	Frequency Range	20- 10 K Hz
07	Max. Operation Voltage	10V
08	Current Consumption	Max.0.5mA
09	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
10	S/N Ratio	≥58dB
11	Sound Pressure Level	110 dB
12	Operating Temperature	-20~+60℃
13	Storage Temperature	-25~+70℃

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

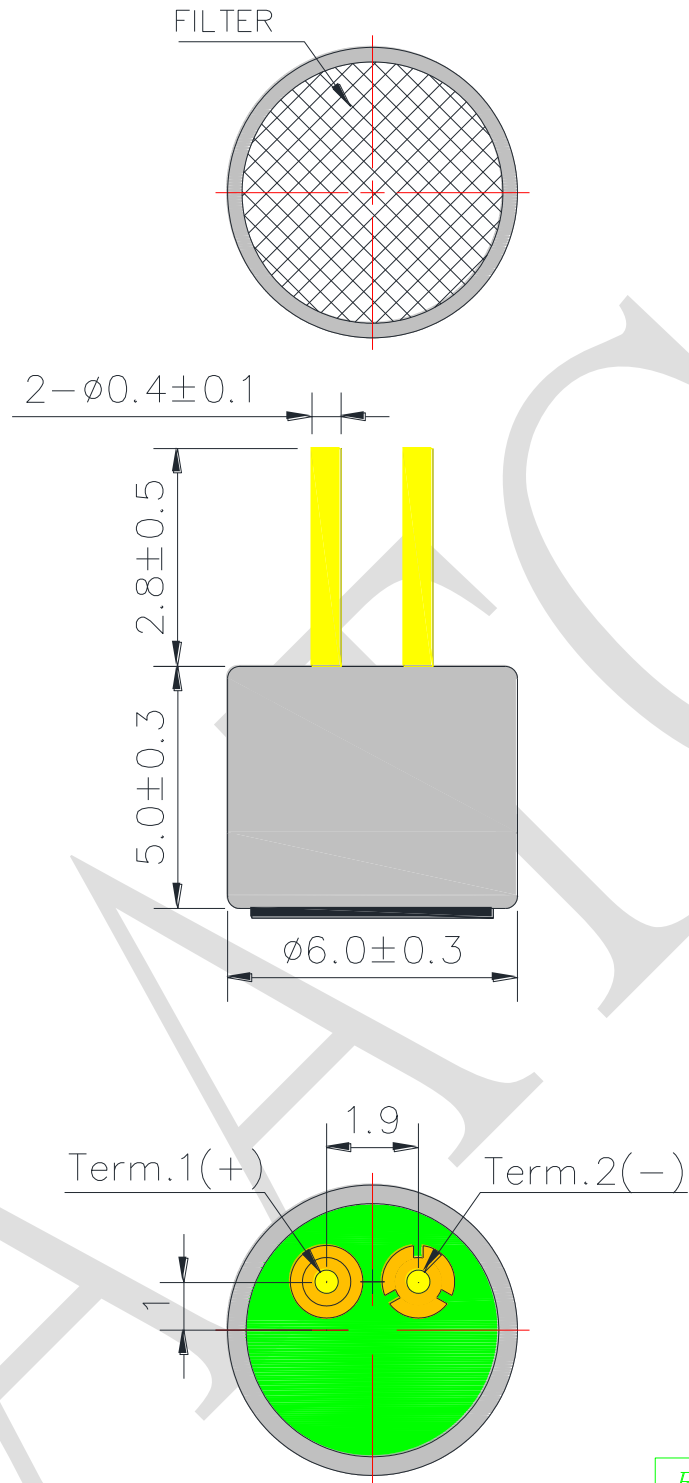

TITLE: <i>MICROPHONE</i>		DRAWN: Moose 2017/07/13	SCALE: 5:1	SHEET: 1 of 1
PART NO. <i>AMF-060C25-1CB</i>	1	DESIGNED: R & D OF AAT	UNITS: mm	
DWG NO. <i>F6050AP-STN 1180</i>		CHECKED:	TOLERANCE ± 0.3	
REV		APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: AL	ONE PLACE DECIMAL $\pm$ ***	
			TWO PLACE DECIMAL $\pm$ ***	
			THREE PLACE DECIMAL $\pm$ ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION