






1. SPECIFICATION

AZS-4329SS-1G

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	24	
02	Operating Voltage	V	4 ~28	
03	Consumption Current	mA (Max)	40	Rated Voltage
04	Resonant Frequency	Hz	2900±500	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	95	Distance at 30cm Rated Voltage / Resonant Frequency
07	Tone Nature	Single		
07	Operating Temp.	°C	-20 ~ +60	
08	Storage Temp.	°C	-30 ~ +70	
09	Weight	g	35±10	
10	Housing Material		ABS	

2. MEASURING METHOD

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

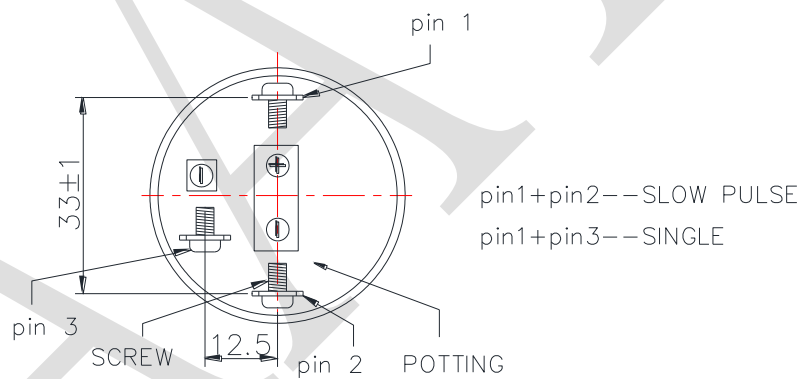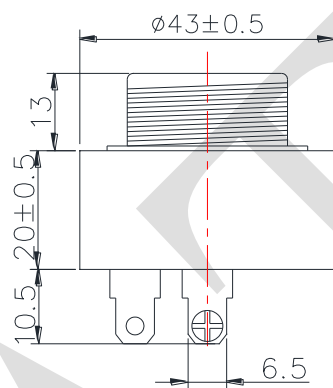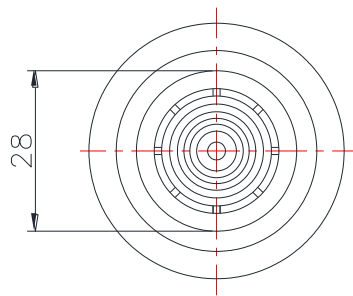

TITLE: <i>PIEZO BUZZER</i>		DRAWN: Moose 2017-09-01	SCALE: 1:1	SHEET: 1 of 1
PART NO. <i>AZS-4329SS-1G</i>	1	DESIGNED: <i>R & D OF AAT</i>	UNITS: <i>mm</i>	
		CHECKED:	TOLERANCE $\pm 0.5\text{ mm}$	
DWG NO.	REV	APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: <i>ABS</i>	ONE PLACE DECIMAL \pm ***	
			TWO PLACE DECIMAL \pm ***	
			THREE PLACE DECIMAL \pm ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION