




1. SPECIFICATION

AZS-43G281

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	12	
02	Operating Voltage	V	4 ~ 28	
03	Consumption Current	mA (Max)	8	Rated Voltage
04	Resonant Frequency	Hz	2800± 500	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	97	Distance at 10cm Rated Voltage
07	Tone Nature	Single		
07	Operating Temp.	℃	-20 ~ +60	
08	Storage Temp.	℃	-30 ~ +70	
09	Weight	g	43	
10	Housing Material		ABS	

3. DIMENSIONS

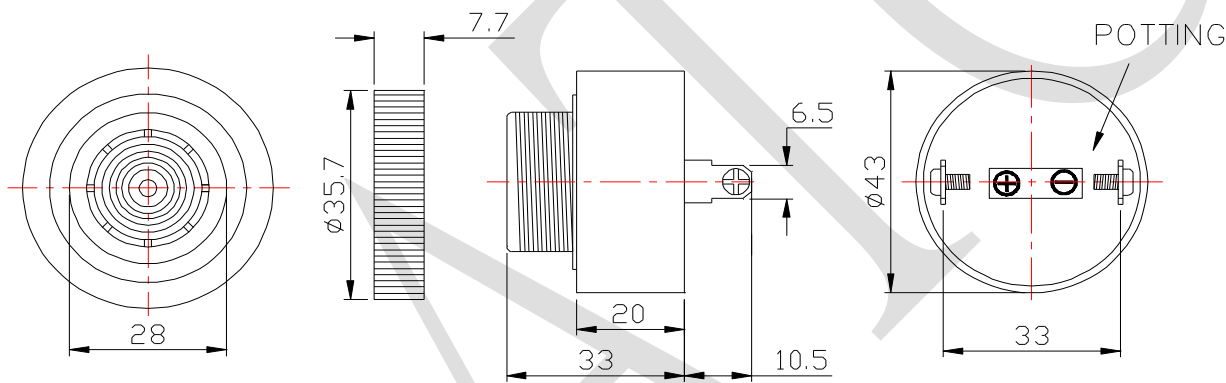

RoHS

TITLE: <i>PIEZO INDICATOR</i>		DRAWN: Lily	2021/03/10	SCALE: 1:1	SHEET: 1 of 1
PART NO. <i>AZS-43G281</i>	1 REV	DESIGNED: R & D OF AAT	UNITS: mm		
DWG NO. <i>UGPM43BX380K</i>		CHECKED:	TOLERANCE ± 0.5		
		APPROVAL:	FIRST ANGLE PROJECTION		
		MATERIAL: ABS			



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION