


1. SPECIFICATION

AKR-40200810-PPC3C

ITEM		SPECIFICATIONS	
01	Type	Dynamic Speaker	
02	Dimension	External diameter 40 x 20 mm	
03	Rated Input Power	1.0 W	
04	Max. Input Power	2.0 W for 1 minute	
05	Impedance	$8\Omega \pm 15\%$ at 1KHz 1V	
06	Resonance Frequency (Fo)	650 Hz $\pm 20\%$ at Fo, 1V	
07	Sound pressure level	97 dB(1.0W/0.1M) ± 3 dB	at AVG 0.8, 1.0, 1.2, 1.5 KHz.
08	Frequency Range	Fo – 6 K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 1.0W.	
10	Magnet	Rare earth permanent (NdFeB) magnet $\Phi 11.0 \times 1.5$ mm	
11	Weight	$8.3g \pm 0.2g$	
12	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
13	Operation Test	Must be normal at program source 1.0 W	
14	Buzz, Rattle, etc.	Should not be audible at 2.83V sine wave between Fo to 2KHz	
15	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
16	Terminal Strength	Capable of withstand 1kg load for 15 seconds without resulting in any damage or rejection.	
17	Temperature	Operating temperature: -30°C to $+70^{\circ}\text{C}$ Storage temperature: -40°C to $+85^{\circ}\text{C}$	

2. DIMENSIONS

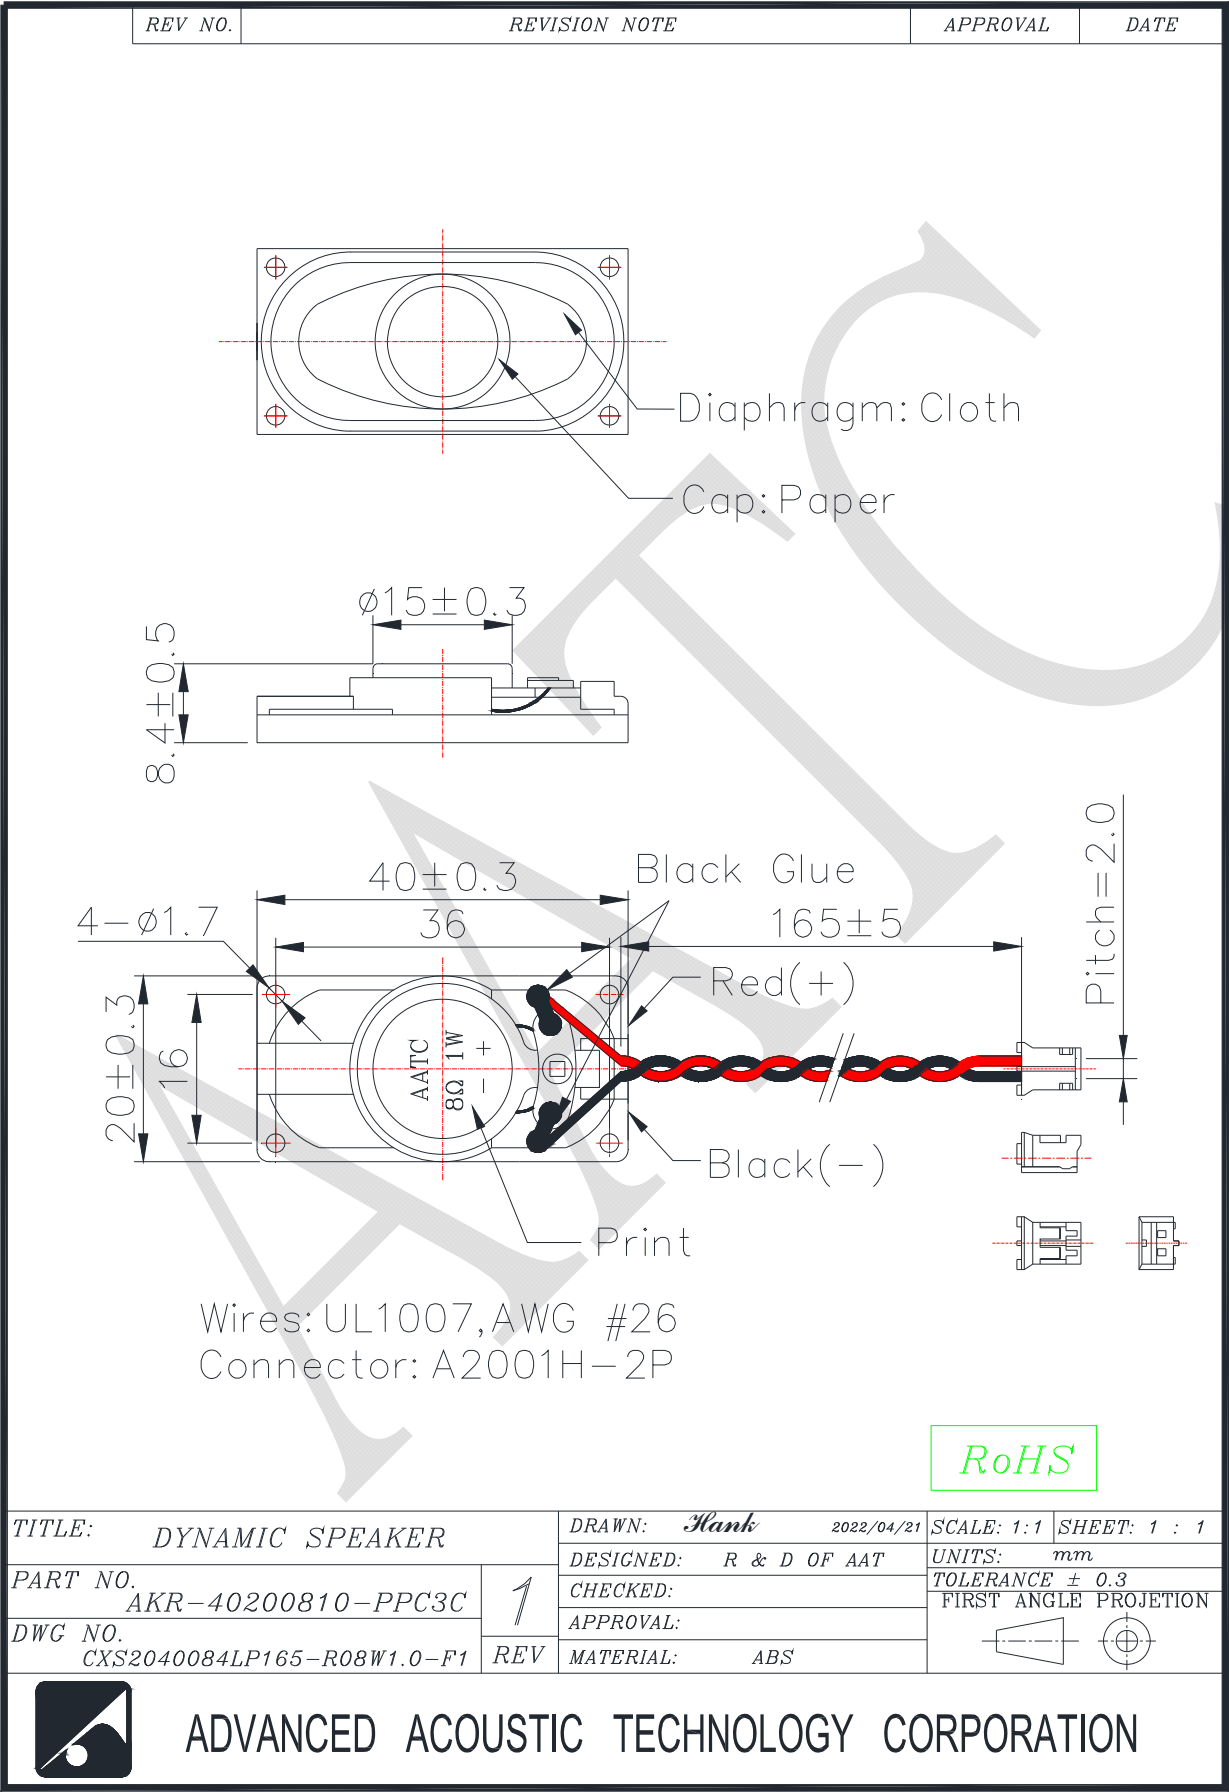

For more information, please contact AATC.

AATC