


1. SPECIFICATION

AR-1532A-3

ITEM		SPECIFICATIONS
01	Type	Dynamic 15mm receiver unit
02	Sound pressure level	115 dB ±3 dB at 1KHz 180mV with IEC318 coupler.
03	Impedance	32Ω± 15% at 1.0 KHz
04	Frequency Range	300 – 3400 Hz
05	Rated Input Power	10 m W
06	Max. Input Power	15 m W
07	Total Harmonics Distortion	Max 10 % at 1 KHz,10 m W.
08	Operating temperature	-20℃ to +60℃
09	Storage temperature	-30℃ to +70℃
10	Weight	1.2g ± 0.4g
11	Magnet	Rare earth permanent (NdFeB) magnet.

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

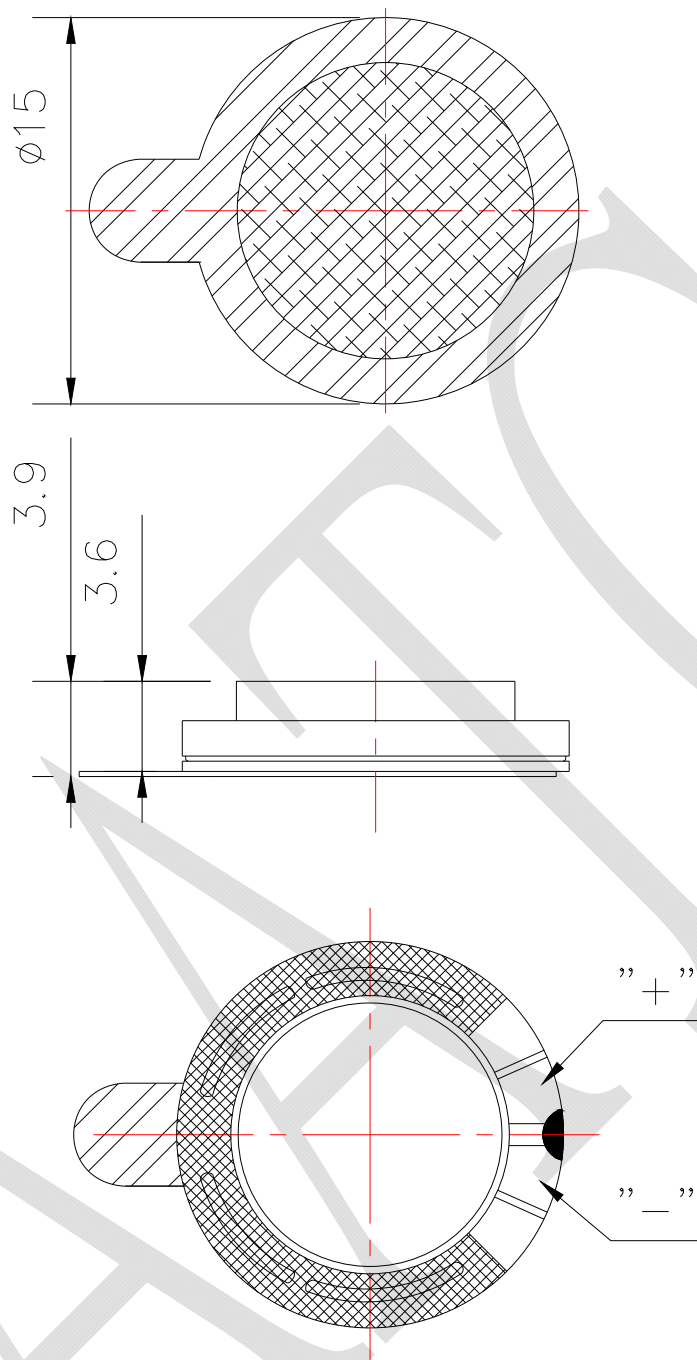

RoHS

TITLE: DYNAMIC RECEIVER		DRAWN: Jack	2015/08/14	SCALE: 2:1	SHEET: 1:1
PART NO. AR-1532A-3	1	DESIGNED: R&D OF AAT		UNITS: mm	
		CHECKED:		TOLERANCE ± 0.5	
DWG NO. CXR15039-R32-B		APPROVAL:		UNLESS OTHERWISE SPECIFIED:	
	REV	MATERIAL: PBT		ONE PLACE DECIMAL $\pm$ ***	
				TWO PLACE DECIMAL $\pm$ ***	
				THREE PLACE DECIMAL $\pm$ ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC