
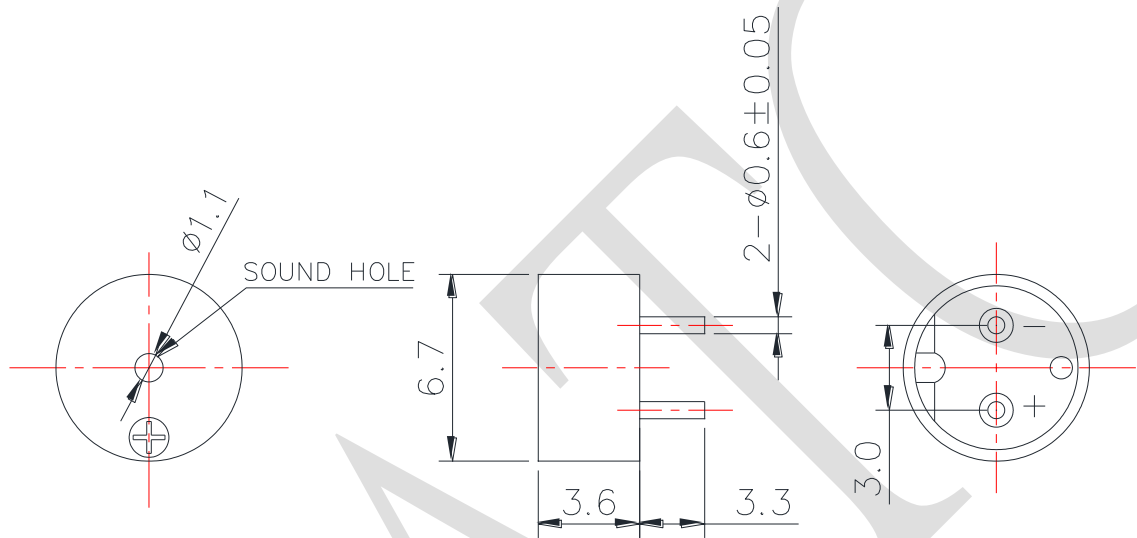


1. SPECIFICATION

AC-703R-P4

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	3.0	
02	Operating Voltage	V	2.0 ~ 4.0	
03	Consumption Current	mA (Max)	Mean : 150	Standard state, standard drive circuit. Rated voltage, rated frequency, Square wave 1/2 duty.
			Peak : 450	
04	Sound pressure level (Distance at 10cm)	dB(A) (Min)	70	
05	Direct Current Resistance	Ω	8 \pm 2	
06	Rated Frequency	Hz	2700	
07	Operating Temp.	°C	-30 ~ +70	
08	Storage Temp.	°C	-40 ~ +85	
09	Weight	g	1.0	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------



RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: Jerry 2014/03/26	SCALE: 4:1	SHEET: 1 of 1
PART NO. AC-703R-P4	2	DESIGNED: R&D OF AAT	UNITS: mm	
DWG NO.		CHECKED:	TOLERANCE ± 0.5	
		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***	
	REV	MATERIAL: NORYL		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC