


1. SPECIFICATION

AKB-58230810-PPCW1C

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 57.5 x 23 x 14.85 mm	
03	Rated Input Power	1.0 W	
04	Max. Input Power	2.0 W for 1 minute.	
05	Impedance	$8\Omega \pm 15\%$ at 2 KHz 1V	
06	Resonance Frequency (Fo)	1100 Hz $\pm 20\%$ at Fo, 1V	
07	Sound pressure level	103 dB(1.0W/0.1M) ± 3 dB	at AVE 0.8, 1.0, 1.2, 1.5 KHz.
08	Frequency Range	Fo – 20 K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 1.5 V.	
10	Magnet	Rare earth permanent (NdFeB) magnet $\Phi 11 \times 2t$ mm	
11	Weight	10.8g ± 0.2 g	
12	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
13	Operation Test	Must be normal at program source 1.0 W	
14	Buzz, Rattle, etc.	Should not be audible at 2.83V sine wave between Fo to 20KHz	
15	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
16	Terminal Strength	Capable of withstand 1kg load for 15 seconds without resulting in any damage or rejection.	
17	Temperature	Operating temperature: -20°C to +60°C Storage temperature: -30°C to +70°C	
18	Waterproof	IPX4(For diaphragm protection only)	

2. DIMENSIONS

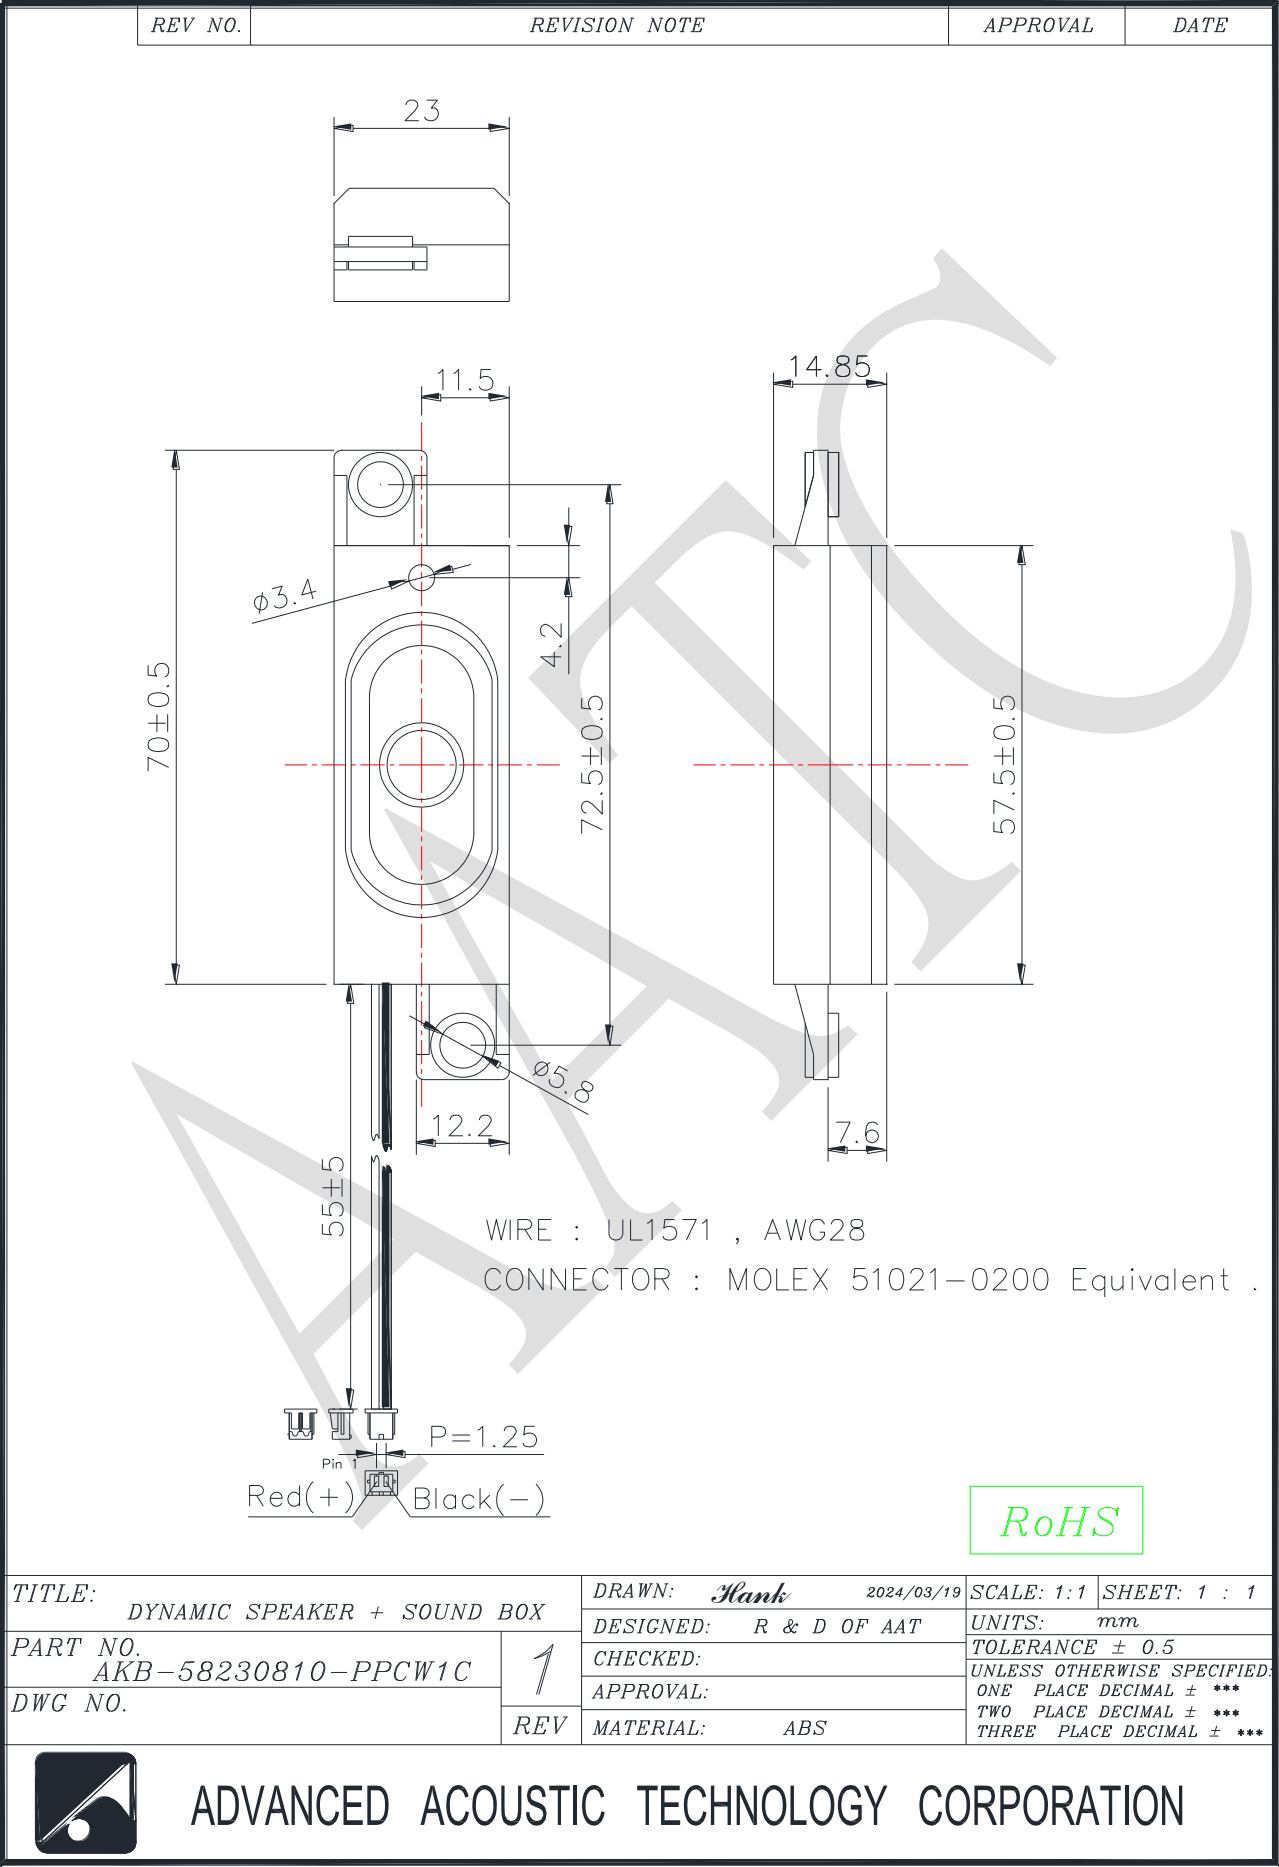

For more information, please contact AATC.

AATC