



1. SPECIFICATION

AB-2317G12C

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	12	
02	Operating Voltage	V	8 ~ 15	
03	Consumption Current	mA (Max)	30	Rated Voltage
04	Resonant Frequency	Hz	400 ± 100	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	75	Distance at 20cm Rated Voltage
07	Operating Temp.	°C	-20 ~ +60	
08	Storage Temp.	°C	-20 ~ +60	
09	Weight	g	6.5	

2. MEASURING METHOD

2-1. Test Condition

STANDARD

Temperature : 15 ~ 35°C

Relative humidity : 25% ~ 85%,

Atmospheric pressure: 860mbar to 1060mbar.


JUDGEMENT

Temperature : 20±3°C

Relative humidity : 60% ~ 70%,



Atmospheric pressure : 860mbar to 1060mbar

2-2. Standard Test Fixture

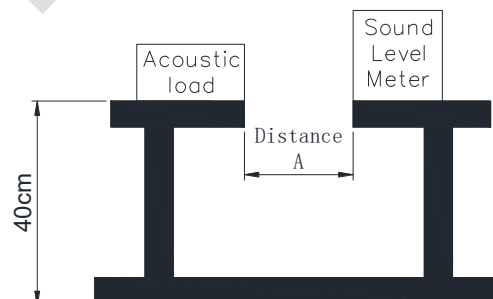

2-3. SPL Curve (For Reference Only)

Test distance : A=20 cm

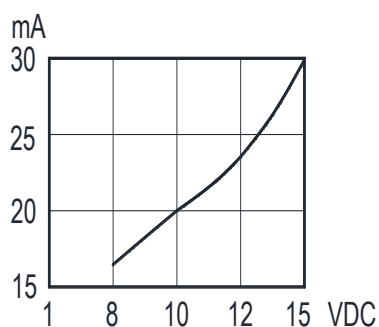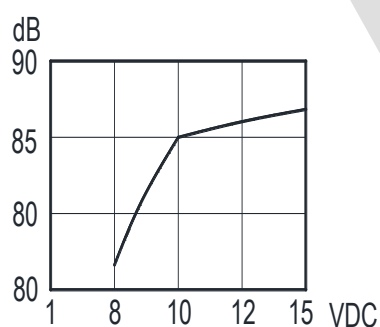

3. DIMENSIONS

