

1. SPECIFICATIONS

AMB-O60F25W-3FBH

01	Sensitivity	-25±3dB (0dB=1V/Pa,1KHz)
02	Standard Operation Voltage	2.0 V
03	Output Impedance	2.2 KΩ
04	※Directivity	Omni directional
05	Frequency Range	100 - 10K Hz
06	Max. Operation Voltage	10V
07	Current Consumption	Max.0.5mA
08	Sensitivity Reduction	Within -3dB (0dB=1V/Pa,1KHz ,Vs=2.0 reduced to 1.5V)
09	S/N Ratio	≥58dB
10	Sound Pressure Level	110 dB
11	Operating Temperature	-20~+60℃
12	Storage Temperature	-25~+70℃
13	Waterproof	IP67(For front cover protection only)

※ For noise-cancelling use, please refer to unidirectional or bidirectional types.

2. MEASURING METHOD

2-1. Test Condition

Standard Conditions:

Generally Temperature 15~35℃

Generally Humidity 45~85%

Generally Atmospheric Pressure 860~1060hpa

Basic Test Conditions:


Temperature 20±2℃

Humidity 60~70%

Generally Atmospheric Pressure 860~1060hpa

2-2. Standard Test Circuit

Vs=2.0V RL=2.2KΩ Te=20℃ R.H.=60%

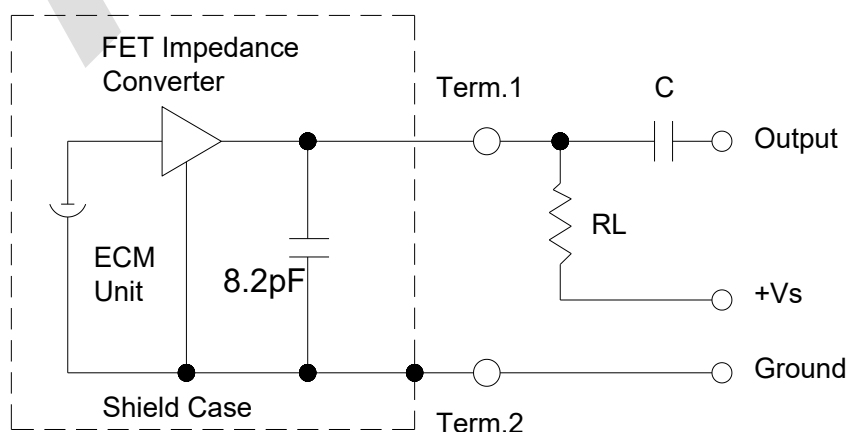

3. DIMENSIONS

