



1. SPECIFICATION

AZI-42W291W

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	9	
02	Operating Voltage	V	5 ~ 15	
03	Consumption Current	mA (Max)	30	Rated Voltage
04	Resonant Frequency	Hz	2900 ~ 3350	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	110	Distance at 10cm Rated Voltage
07	Tone Nature	Dual tone		
08	Operating Temp.	°C	-40 ~ +85	
09	Storage Temp.	°C	-40 ~ +85	
10	Weight	g	12.2 $\pm$ 0.3	
11	Housing Material		PPO	

2. MEASURING METHOD

2-1. Test Condition

STANDARD

Temperature : 15 ~ 35°C

Relative humidity : 25% ~ 85%,

Atmospheric pressure: 860mbar to 1060mbar.

JUDGEMENT

Temperature : 20 $\pm$ 3°C





Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

2-3. Response Curve (For Reference Only)

Test distance : **A=10 cm**

2-2. Standard Test Fixture

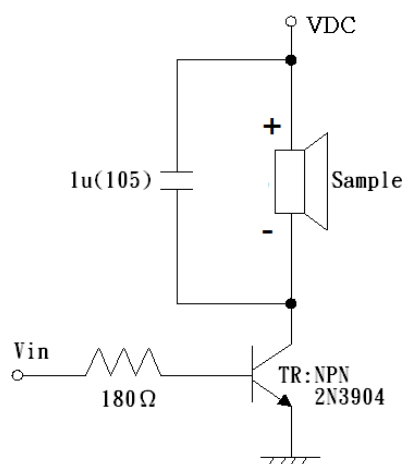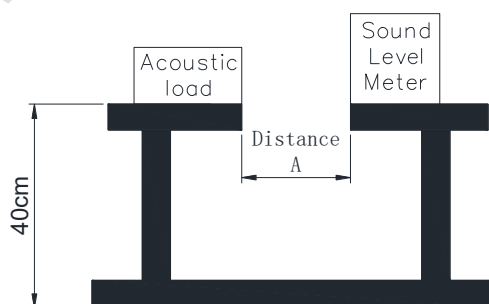

3. DIMENSIONS

