


1. SPECIFICATION

AZS-X45A1

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	12	
02	Operating Voltage	V	6 ~ 15	
03	Consumption Current	mA (Max)	200	Rated Voltage
04	Resonant Frequency	Hz	2300	Rated Voltage
05	Sound pressure level	dB(A) Min.	120	Distance at 10cm Rated Voltage
07	Tone Nature	Siren		
07	Operating Temp.	℃	-30 ~ +70	
08	Storage Temp.	℃	-30 ~ +80	
09	Weight	g	51 ± 2	
10	Housing Material		ABS	

2. MEASURING METHOD

2-1. Test Condition

STANDARD

Temperature : 15 ~ 35℃

Relative humidity : 25% ~ 85%,

Atmospheric pressure: 860mbar to 1060mbar.

JUDGEMENT



Temperature : 20±3℃

Relative humidity : 60% ~ 70%,



Atmospheric pressure : 860mbar to 1060mbar

2-3. Response Curve (For Reference Only)

Test distance : A=10 cm

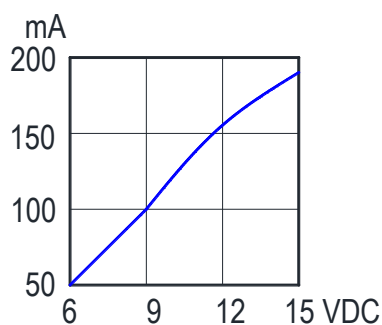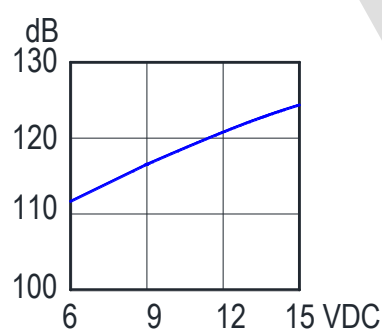

2-2. Standard Test Fixture

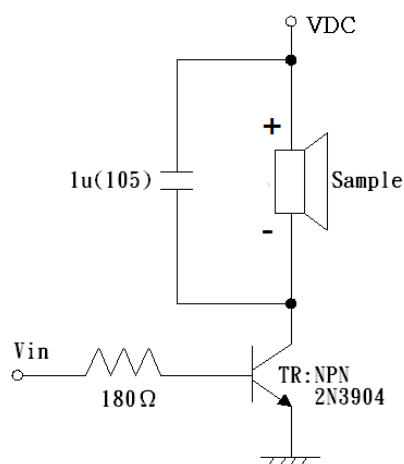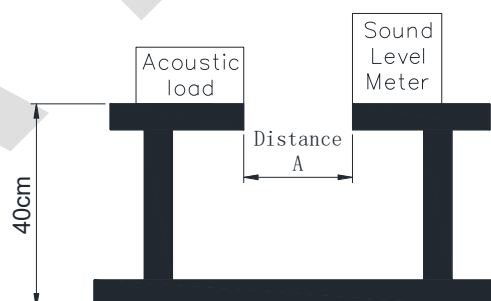

3. DIMENSIONS

