

1. SPECIFICATION

AC-16M12A

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	12	 Standard state, standard drive circuit. Square wave 1/2 duty.
02	Operating Voltage	V	6 ~ 18	
03	Consumption Current	mA Max.	100	
04	Sound pressure level (Distance at 10cm)	dB(A) Min.	85	Rated voltage, rated frequency.
05	Direct Current Resistance	Ω	120 ± 15	
06	Rated Frequency	Hz	2048	
07	Operating Temp.	°C	-40 ~ +85	
08	Storage Temp.	°C	-40 ~ +85	
09	Weight	g	4.3 ±0.3	

2. MEASURING METHOD

2-1. Test Condition


STANDARD

Temperature : 15 ~ 35℃
Relative humidity : 45% ~ 85%,
Atmospheric pressure: 860mbar to 1060mbar.

JUDGEMENT

Temperature : 20±3℃
Relative humidity : 60% ~ 70%,
Atmospheric pressure : 860mbar to 1060mbar

2-2. Standard drive circuit

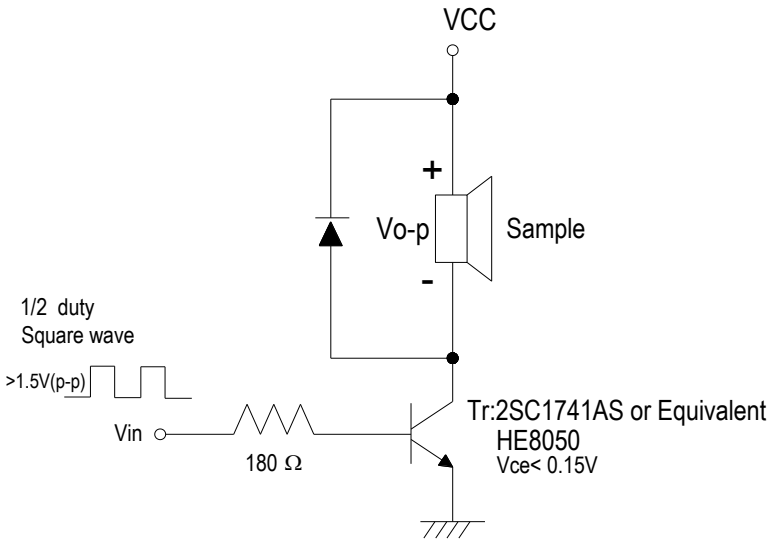

3. DIMENSIONS

