



1. SPECIFICATION

AZ-3039S-1P

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	12	
02	Operating Voltage	V	3~ 24	
03	Consumption Current	mA (Max)	15	Rated Voltage
04	Resonant Frequency	Hz	3900±500	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	105	Distance at 10cm Rated Voltage / Resonant Frequency
07	Tone Nature	Single		
07	Operating Temp.	℃	-40 ~ +85	
08	Storage Temp.	℃	-40 ~ +85	
09	Weight	g	9.0±2.0	
10	Housing Material		PBT	

2. MEASURING METHOD

2-1. Test Condition

STANDARD

Temperature : 15 ~ 35℃

Relative humidity : 25% ~ 85%,

Atmospheric pressure: 860mbar to 1060mbar.

JUDGEMENT

Temperature : 20±3℃





Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

2-3. Response Curve (For Reference Only)

Test distance : A=10 cm

2-2. Standard Test Fixture

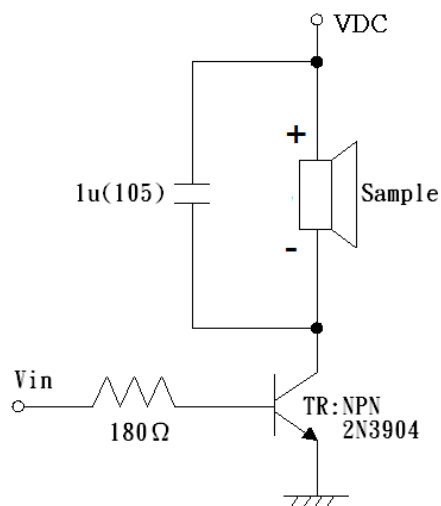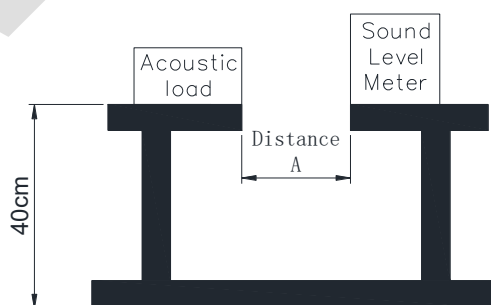

3. DIMENSIONS

