


1. SPECIFICATION

ART-38150H-PP-1P

	ITEM	UNIT	SPECIFICATIONS		CONDITION
01	Dimension 尺寸	mm	Φ 38 X 21		Refer to attached drawing in details.
02	Input power 輸入功率	mW	1		White noise is applied for 96 hours.
03	Max. Input power 額定輸入最大功率	mW	Max.10		at room temperature for 60s on and 120s off for 10 cycles.
04	Impedance 交流阻抗	Ω	150 $\pm$ 15%		at 1KHz /1V.
05	S.P.L 音壓位準 Sound pressure level	dB	94 $\pm$ 3		at 1KHz 60mV with IEC318 coupler.
06	Magnet Field Intensity.	dB A/m	Axial $\geq$	- 19	at 1KHz 60mV with IEC318 coupler.
		dB A/m	Radial $\geq$	-22	
07	Frequency range 有效頻寬	Hz	300~3.4K		
08	T.H.D 總諧波失真 Total Harmonics Distortion	%	Max.5		at 1KHz 387mV/1mW Input power.
09	Operating temp. 工作溫度	$^{\circ}\text{C}$	-20 ~ 60		
10	Storage temp. 儲存溫度	$^{\circ}\text{C}$	-30 ~ 70		
11	Weight 淨重	g	34 $\pm$ 5		
12	Buzze & Rattle 異常音	Hz	300~2K		Should not be audible at 387mV/1mW sine wave.

2. DIMENSIONS

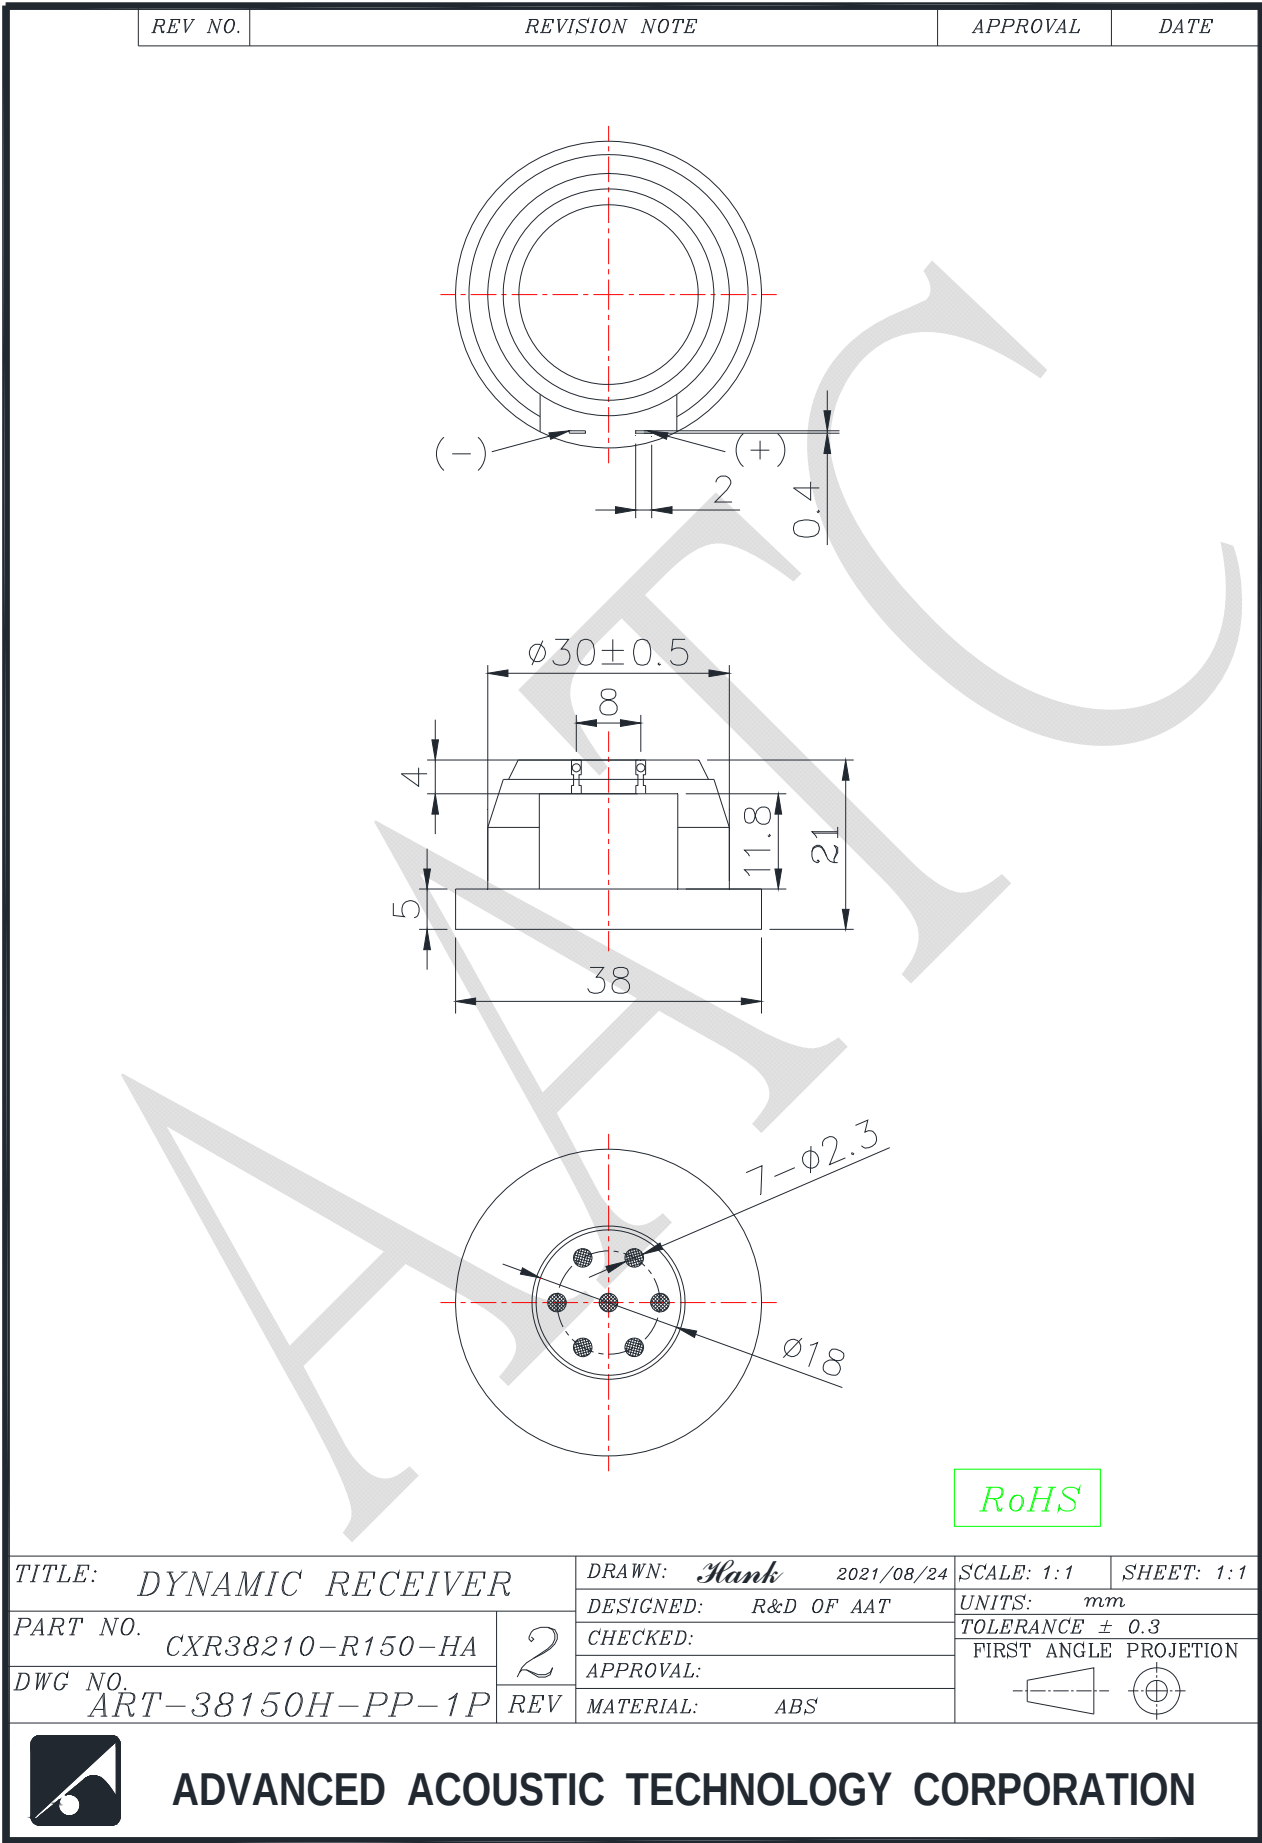

For more information, please contact AATC.

AATC