


1. SPECIFICATION

AK-300810-MM8C

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter Ø30 mm	
03	Rated Input Power	1.0 W	
04	Max. Input Power	1.5 W for 1 minute	
05	Impedance	8Ω ± 15% at 2.0KHz 1V	
06	Resonance Frequency (Fo)	800 Hz ± 20% at Fo, 1V	
07	Sound pressure level	94 dB(0.1W/0.1M) ± 3 dB	at AVG 0.8, 1.0, 1.2, 1.5 KHz.
		104 dB(1.0W/0.1M) ± 3 dB	
08	Frequency Range	Fo – 7 K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 1 W.	
10	Magnet	Rare earth permanent (NdFeB) magnet	
11	Weight	8.0g ± 0.5g	
12	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
13	Operation Test	Must be normal at program source 1.0W	
14	Buzz, Rattle, etc.	Should not be audible at 2.83V sine wave between Fo to 2KHz	
15	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
16	Terminal Strength	Capable of withstand 1kg load for 15 seconds without resulting in any damage or rejection.	
17	Temperature	Operating temperature: -20℃ to +60℃	
		Storage temperature: -20℃ to +70℃	

2. DIMENSIONS

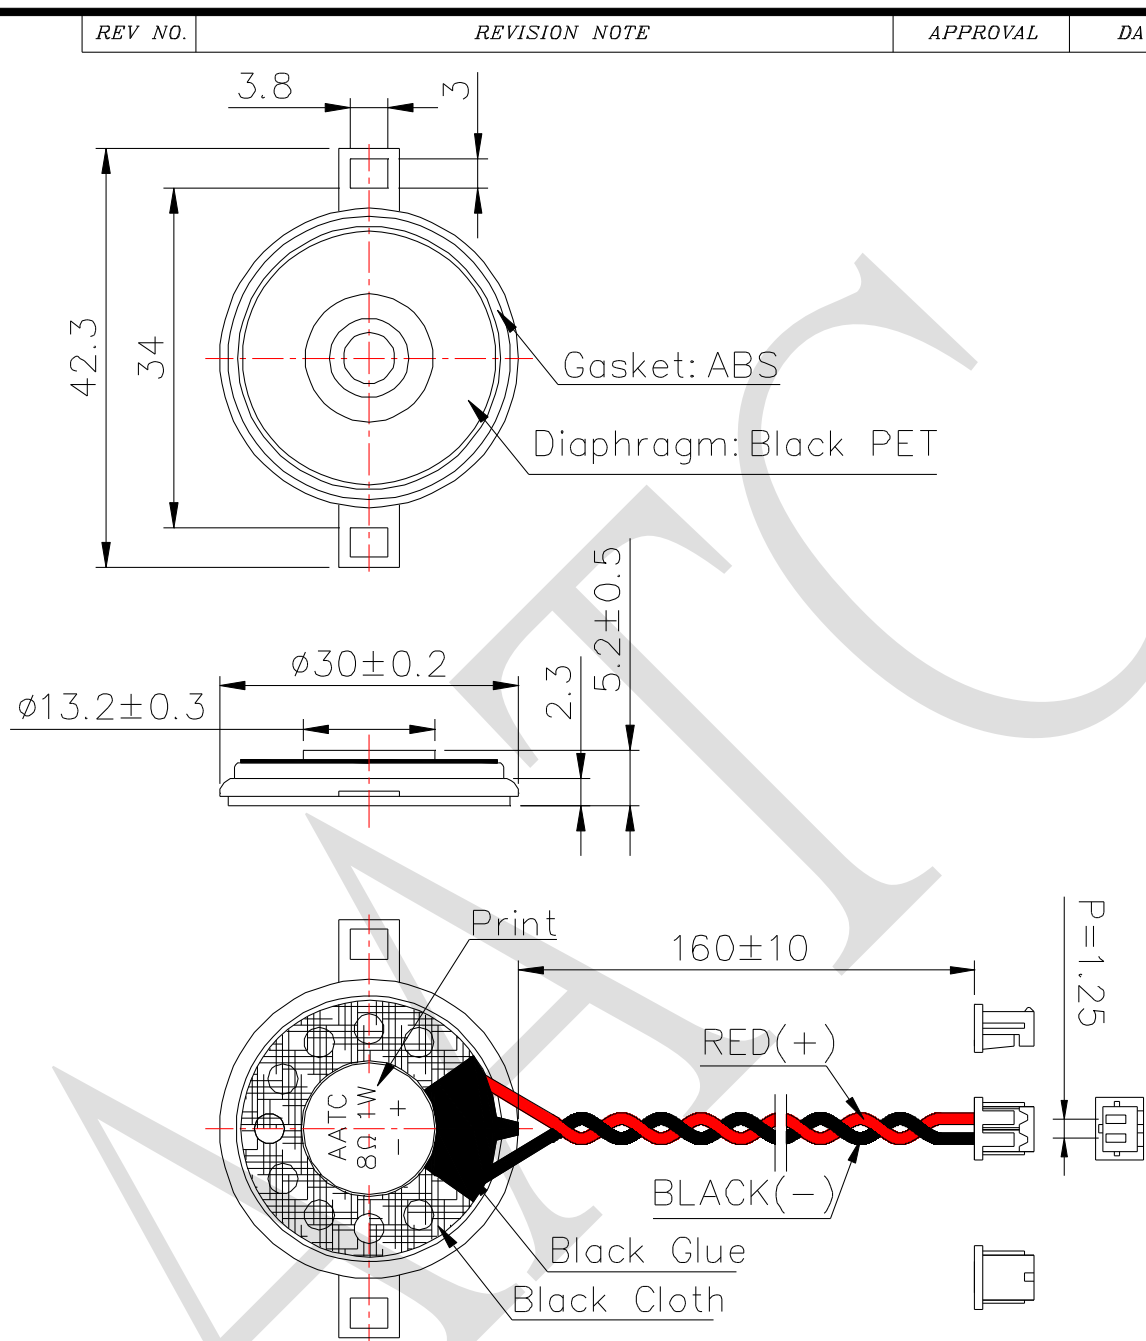

Wires: UL1571,30#AWG ;
Connector : Equivalent to MOLEX 1205HM-02

RoHS

TITLE: DYNAMIC SPEAKER		DRAWN: Amanda 2024/06/15	SCALE: 1:1	SHEET: 1:1
PART NO. AK-300810-MM8C	1	DESIGNED: R&D OF AAT	UNITS: mm	
		CHECKED:	TOLERANCE ± 0.5	
DWG NO.	REV	APPROVAL:	FIRST ANGLE PROJECTION	
		MATERIAL: SPCC		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC